

LED EXTRUSIONS






LED STRIP EXTRUSIONS

- Various mounting options - (surface, corners, recessed, suspended, flange, inground)
- Polycarbonate Diffused lensing
- Thermal management with heat dissipation
- Field cuttable to size
- Field installed
- Customizable with your selection of LED Strip
- High-quality anodized aluminum

Mini Surface Mounting Series


(Unit: mm)

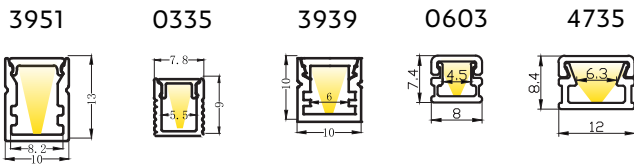

Part # AL-MSM-xxxx

Mini Recessed Mounting Series


(Unit: mm)



Part # AL-MRM-xxxx

Regular Surface Mounting Series


(Unit: mm)

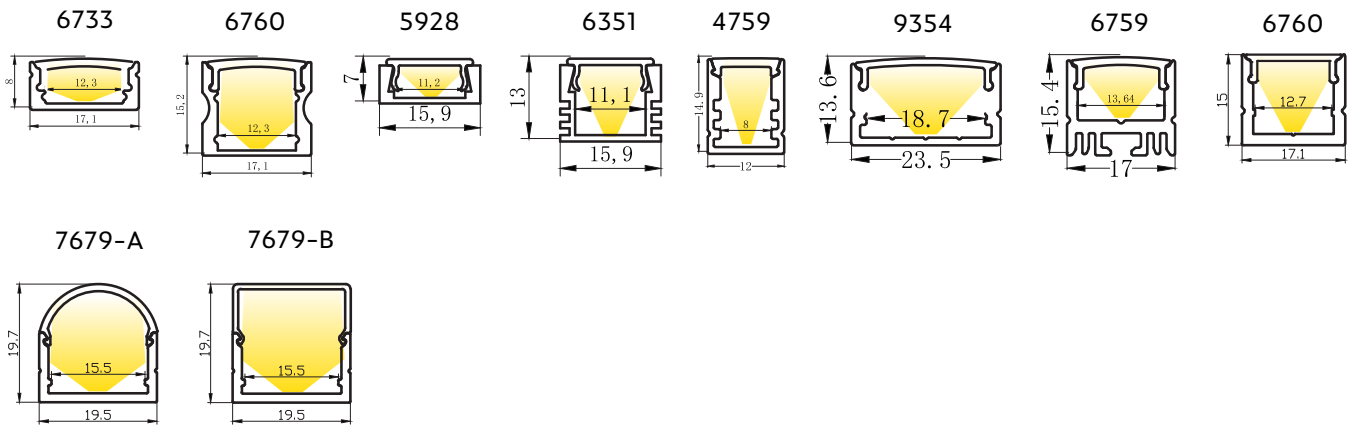

Part # AL-RSM-xxxx

Regular Recessed Mounting Series


(Unit: mm)

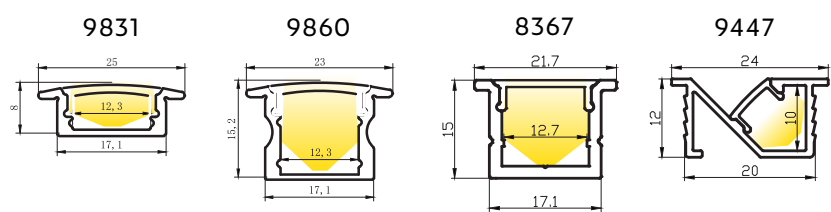

Part # AL-RRM-xxxx

Corner Mounting Series


(Unit: mm)

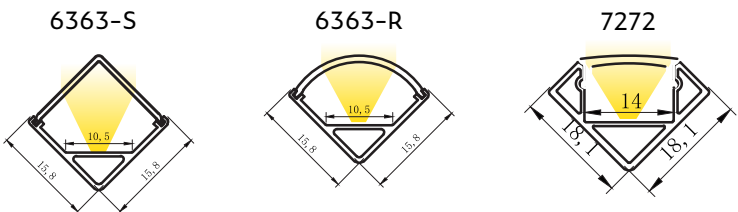

Part # AL-CM-xxxx

Regular Suspension Series


(Unit: mm)

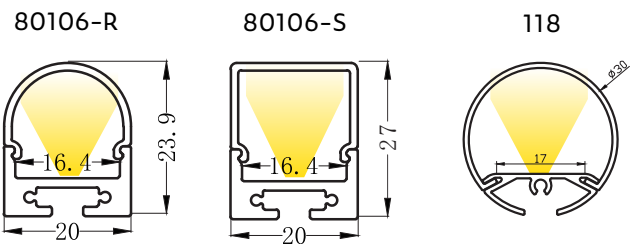

Part # AL-RS-xxxx

In Ground Series


(Unit: mm)



Part # AL-IG-xxxx

Wall Washer Series


(Unit: mm)



Part # AL-WW-xxxx

Decorative Series


(Unit: mm)

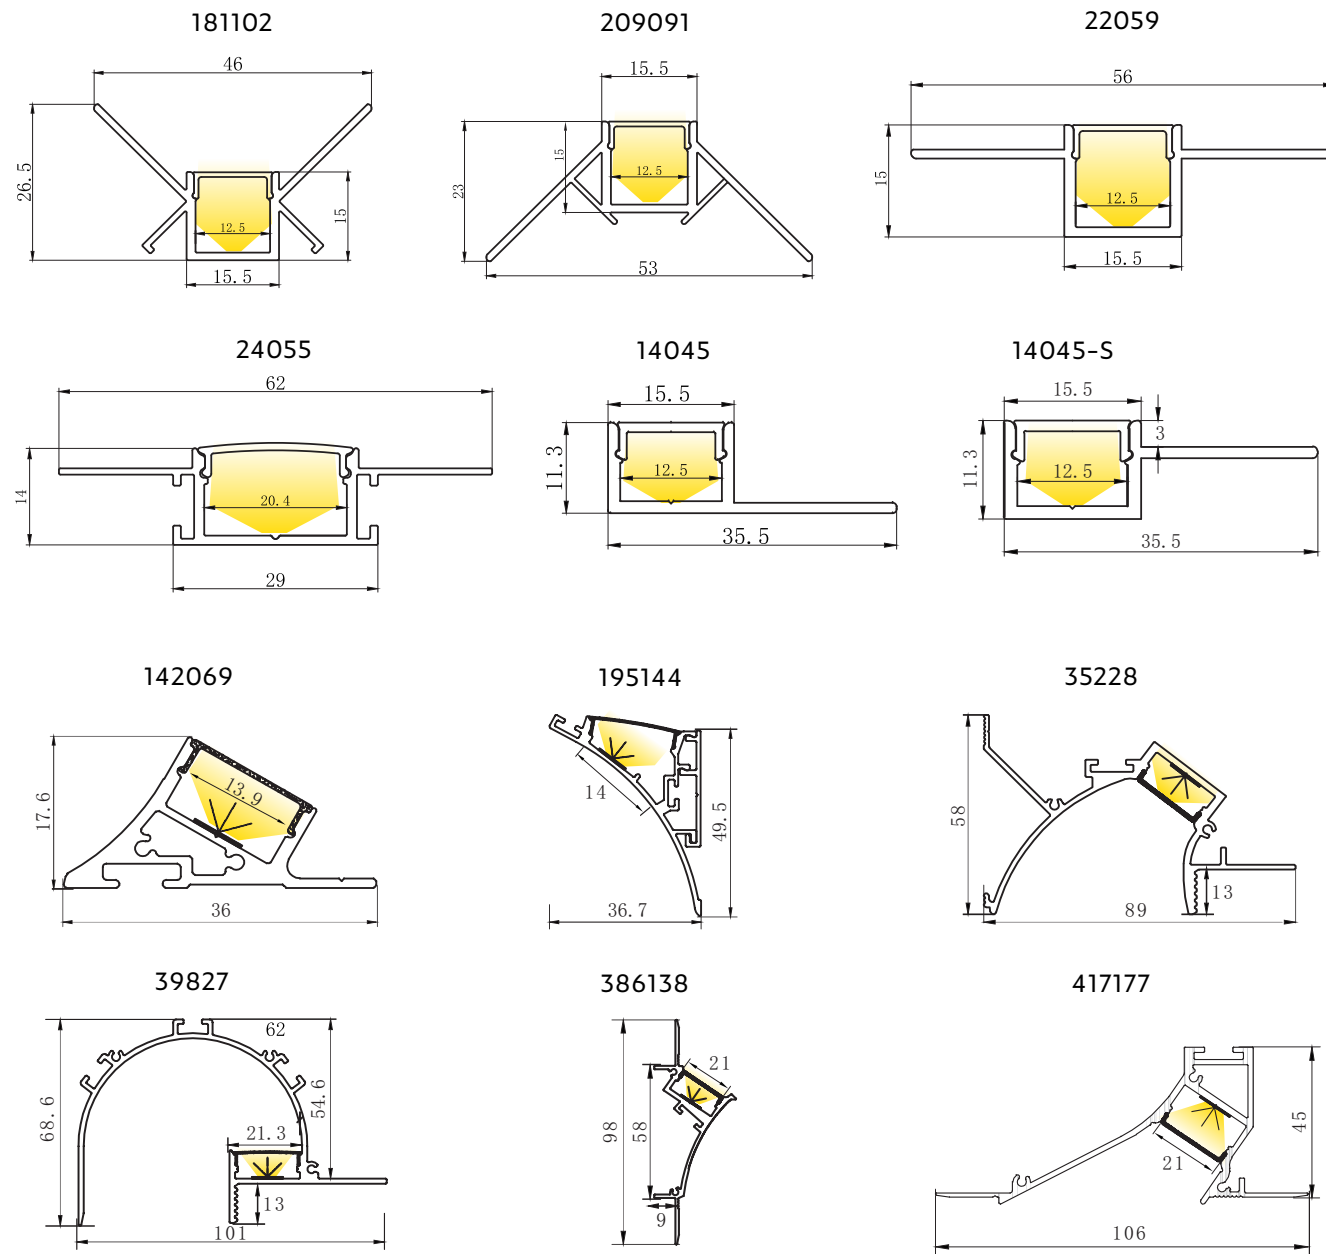

Part # AL-DS-xxxx

Office Suspension Series


(Unit: mm)

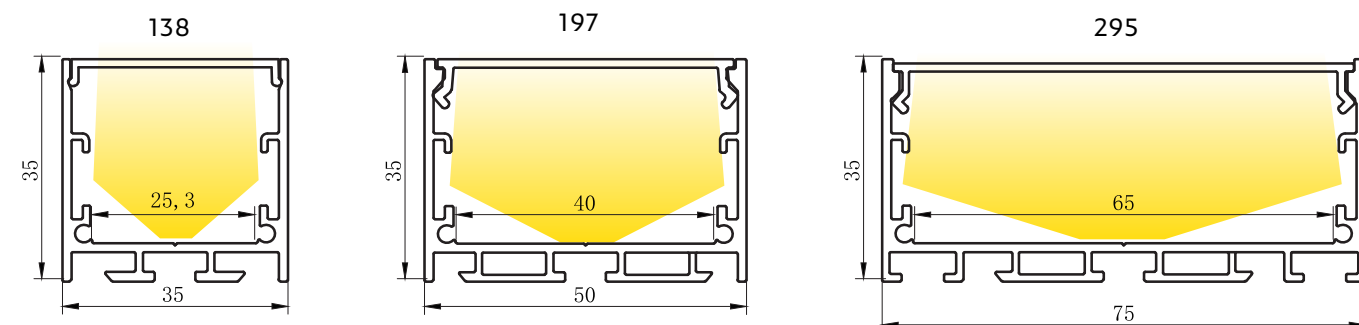

Part # AL-OSS-xxx

Office Recessed Mounting Series


(Unit: mm)

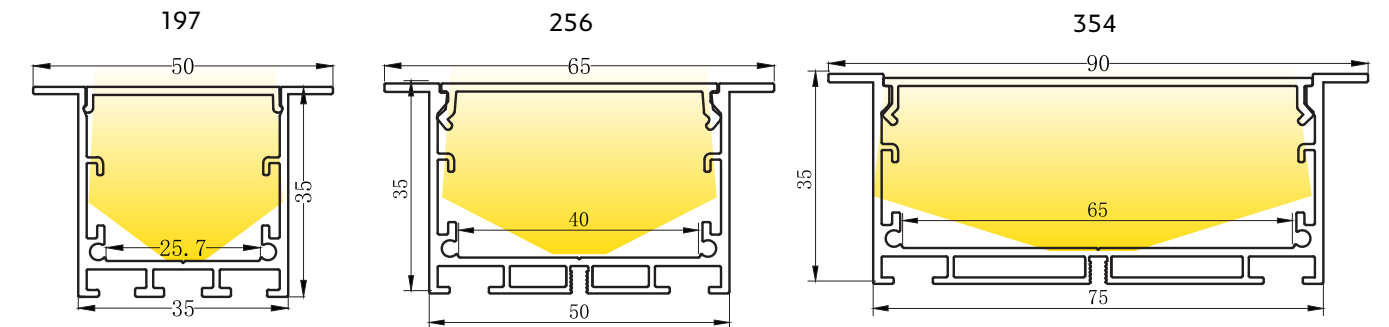

Part # AL-ORMS-xxxx


Mounting Accessory Series for Waterproof Strip

(Unit: mm)

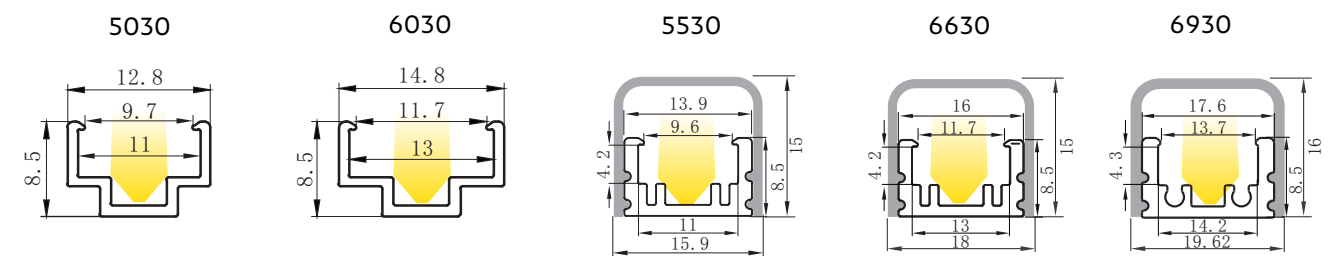


Part # AL-MASW-xxxx

Aluminum Options

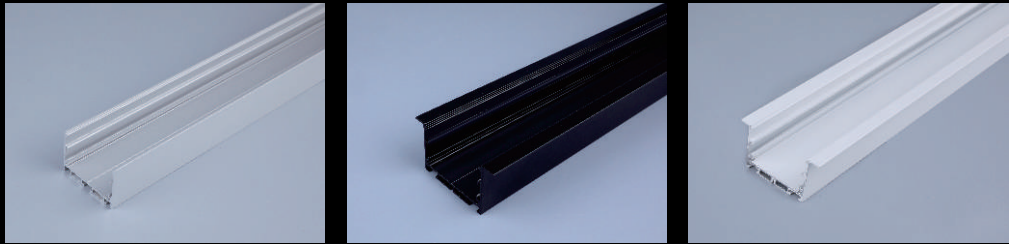

Silver Black White

Diffusion PC Cover Options

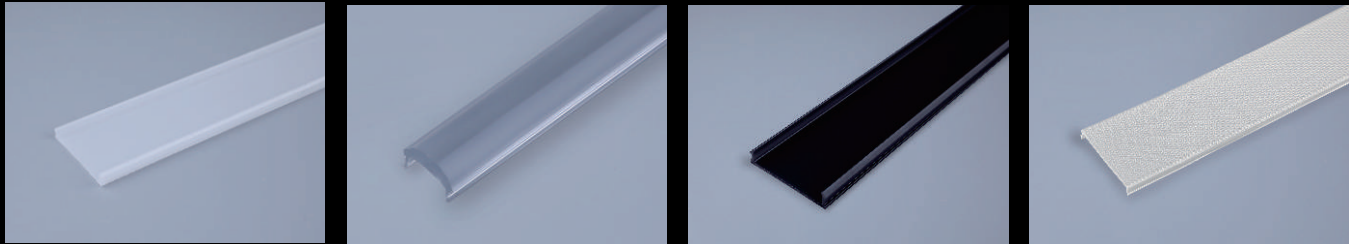

Milky
Transmission:83%
For Dot-free

Transparent
Transmission:93%
For High transmittance

Black
Transmission:60%
For Decoration


Prismatic
Transmission:83%
For Anti-glare UGR <19 optional

Length Increment Diagram Illustration


LED Strip



Aluminum Profile+Endcap

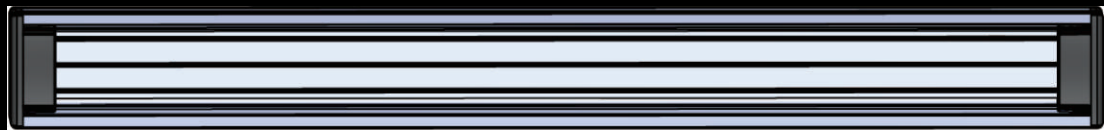

LED Strip+ Cable+Aluminum Profile+Endcap

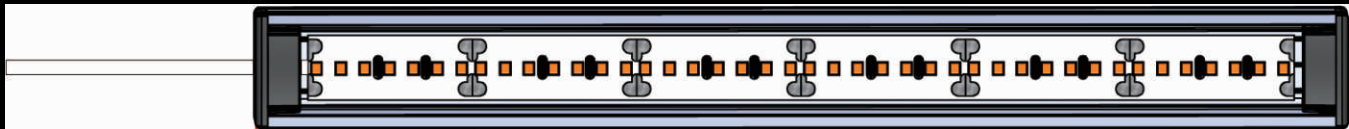

End Cap Length Extra Profile Length LED Strip Length Extra Profile Length End Cap Length





Mini Surface Mounting Series

Mini Surface Mounting Series

(Unit: mm)

MSM-3951





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 10*13mm [0.39*0.51in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 5mm [0.2in.]
- linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51in.]




Mini Surface Mounting Series

(Unit: mm)



MSM-0603



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 8*7mm [0.6*0.3in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 5mm [0.2in.]
- linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]

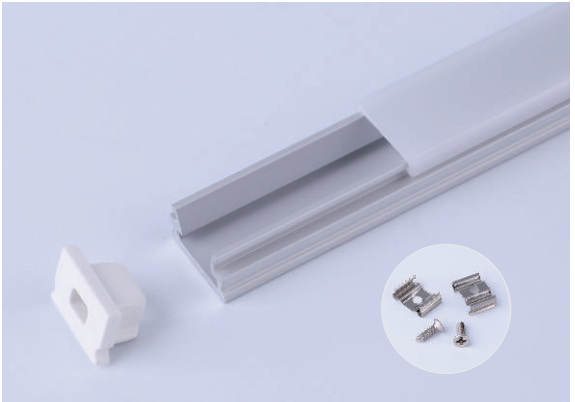


MSM-0335



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 7.8*9mm [0.3*0.35in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 5mm [0.2in.]
- linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+ 13mm [0.51in.]





MSM-4735



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 12*9mm [0.47*0.35in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8mm [0.31in.]
- linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]

MSM-3939



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 10*10mm [0.39*0.39in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 5mm [0.2in.]
- linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]



Channel and LED Strip Compatability Chart						Mini Surface Mounting Series					Mini Recessed Mounting	
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	MSM-3951	MSM-0335	MSM-3939	MSM-0603	MSM-4735	MRM-6359	MRM-0547
✓			HEFC-9682S	0.2" (5mm)	IP20	✓	✓	✓	✓	✓	✓	✓
✓			ICBI-9645S	0.24" (6mm)	IP20					✓		
✓			ULHE-9519S	0.32" (8mm)	IP20					✓		
✓			ULHE-9522S	0.32" (8mm)	IP20					✓		
✓			HEFC-9687S	0.32" (8mm)	IP20					✓		
✓			OSMV-FE62S	0.32" (8mm)	IP20					✓		
✓			TDFP-414S	0.32" (8mm)	IP54					✓		




Regular Surface Mounting Series

Regular Surface Mounting Series

(Unit: mm)



RSM-6733




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 17.1*8.5mm [0.67*0.33in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥240LED/M/Row [73LED/ft.]
- Light Output Rate of Finished Product: 60-70%
- Length of Finished Product: Strip Length+13mm [0.51in.]





RSM-6351



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 16*13mm [0.63*0.51in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10mm [0.31/0.39in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+13mm [0.51in.]

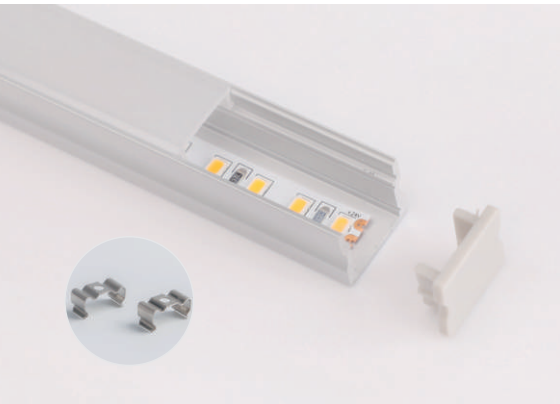



RSM-6760



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 17.1*15.3mm [0.67*0.6in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51in.]





RSM-4759



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 12*15mm [0.47*0.59in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8mm [0.31in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+25mm [0.981in.]


RSM-5928



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 15.9*7mm [0.59*0.28in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10mm [0.31/0.39in.]
- Linear LED Density@milky cover: ≥240LED/M/Row [73LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]



RSM-9354





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 23.5*13.6mm [0.93*0.54in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 12/15mm [0.47/0.59in.]
- Linear LED Density@milky cover: ≥120LED/M [36LED/ft.]
- Light Output Rate of Finished Product: 60-70%
- Length of Finished Product: Strip Length+13mm [0.51in.]



Regular Surface Mounting Series

(Unit: mm)



RSM-
6759





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 17.1*15mm [0.67*0.59in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]





RSM-
7679-B



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 19.4*20mm [0.76*0.79in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+14mm [0.55in.]

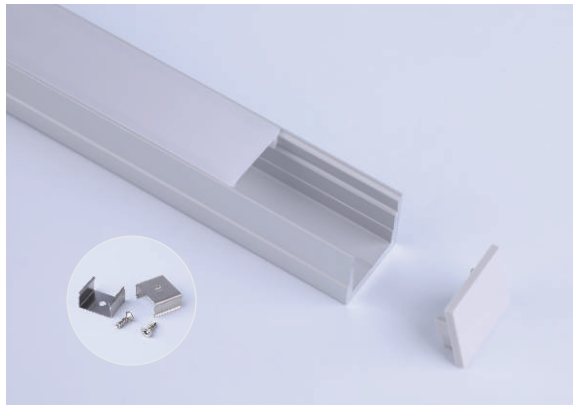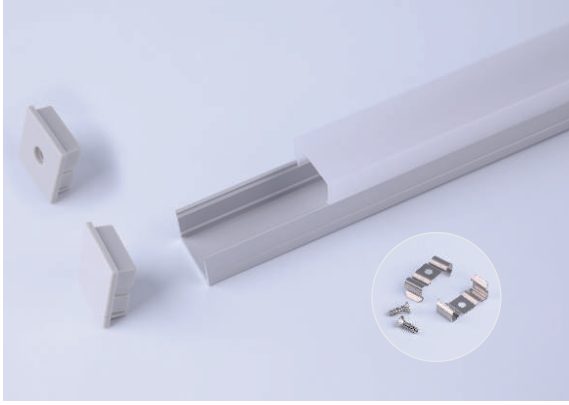


RSM-
6760




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 17*15mm [0.67*0.6in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.].]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+14mm [0.55in.]

RSM-
7679-A



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 19.4*20mm [0.76*0.79in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M}$ [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+14mm [0.55in.]

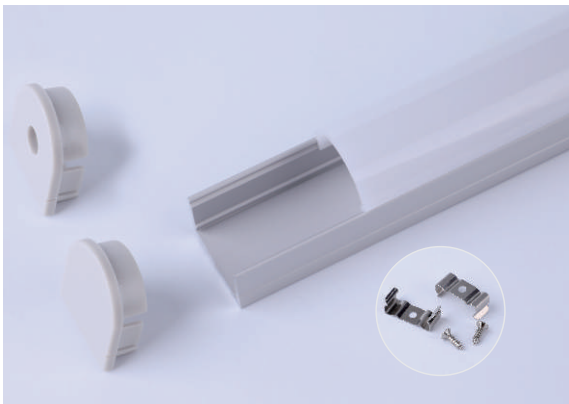




Regular Recessed Mounting Series


Regular Recessed Mounting Series

(Unit: mm)

RRM-9831




Installation Diagram



Material: Anodized Aluminum 6063
Color: Silver / Black / White
Cover: Regular PC diffuser (milky / transparent / black)
Width*Height: 25*8.0mm [0.98*0.31in.]
Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
End cap: 2pcs/unit (1pc with hole, 1pc without hole)
Clip/Screw: 2pcs/M [2pcs/39.4in.]
Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
Linear LED Density@milky cover: $\geq 240\text{LED/M/Row}$ [73LED/ft.]
Light Output Rate of Finished Product: 60-70%
Length of Finished Product: Strip Length+22mm [0.87in.]



RRM-9860




Installation Diagram




Material: Anodized Aluminum 6063
Color: Silver / Black / White
Cover: Regular PC diffuser (milky / transparent / black)
Width*Height: 25*15.3mm [0.98*0.6in.]
Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
End cap: 2pcs/unit (1pc with hole, 1pc without hole)
Clip/Screw: 2pcs/M [2pcs/39.4in.]
Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
Light Output Rate of Finished Product: 40-50%
Length of Finished Product: Strip Length+22mm [0.87in.]


RRM-8367



Installation Diagram




Material: Anodized Aluminum 6063
Color: Silver / Black / White
Cover: Regular PC diffuser (milky / transparent / black)
Width*Height: 21*17mm [0.83*0.67in.]
Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
End cap: 2pcs/unit (1pc with hole, 1pc without hole)
Clip/Screw: 2pcs/M [2pcs/39.4in.]
Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
Light Output Rate of Finished Product: 50-60%
Length of Finished Product: Strip Length+18mm [0.71in.]


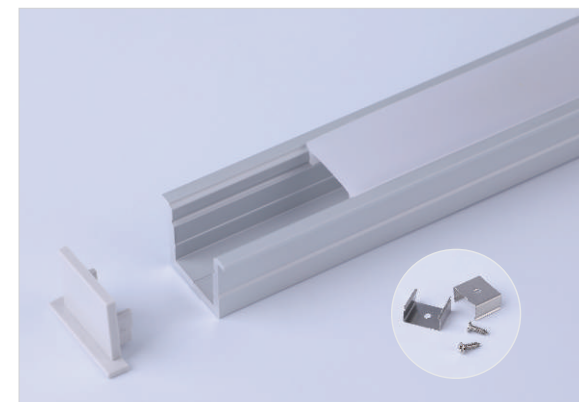


Regular Recessed Mounting Series


(Unit: mm)

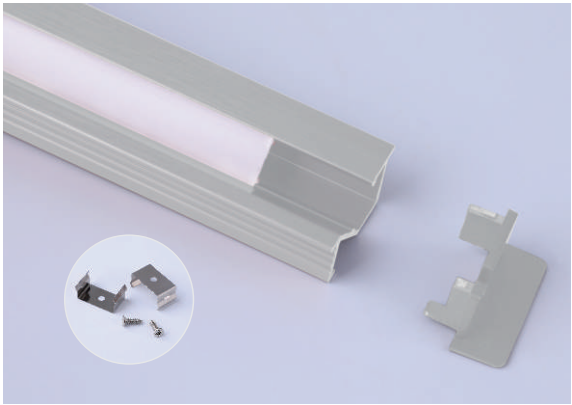

RRM-
9447



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 24*12mm [0.94*0.47in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8mm [0.31in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+28mm [1.1in.]

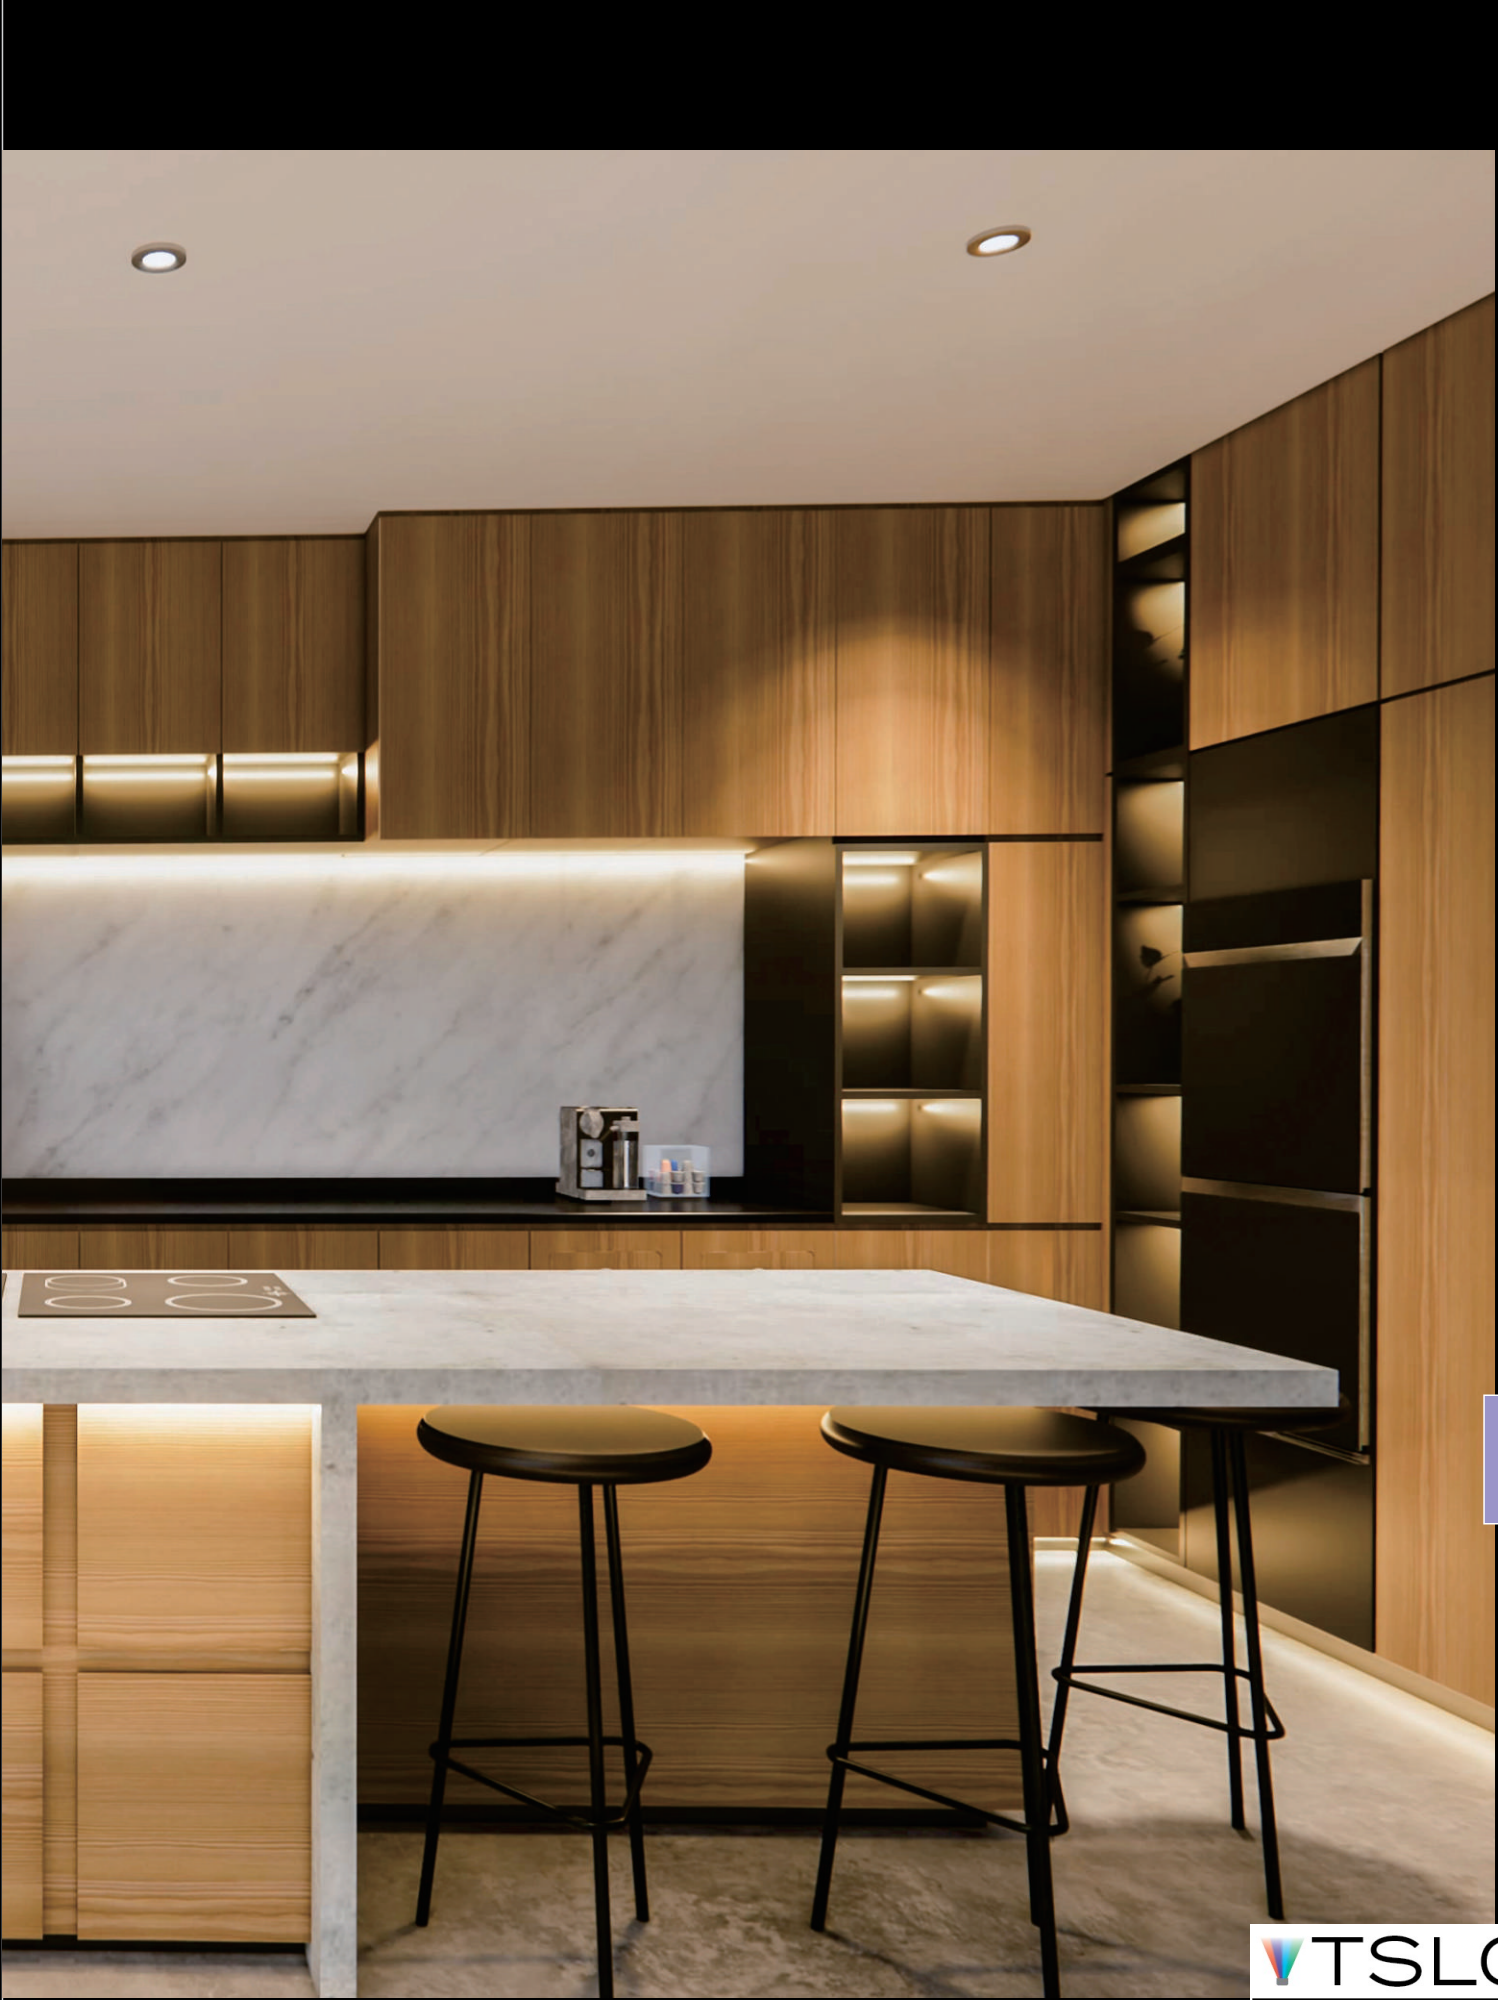

Channel and LED Strip Compatability Chart						Regular Surface Mounting									Regular Recessed Mounting			
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	RSM-6733	RSM-6760	RSM-5928	RSM-6351	RSM-4759	RSM-9354	RSM-6759	RSM-6760A	RSM-7679-A	RRM-9831	RRM-9860	RRM-8367	RRM-9447
✓			HEFC-9682S	0.2" (5mm)	IP20													
✓			ICBI-9645S	0.24" (6mm)	IP20													
✓			ULHE-9519S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			ULHE-9522S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			HEFC-9687S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			OSMV-FE62S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			TDFP-414S	0.32" (8mm)	IP54	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			ULPS-9033S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
✓			HEFC-9677S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
✓			ULHE-9561S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
✓			HEP-L624S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
	✓		CMLP-9688S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
		✓	TUNE-LN28S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
		✓	HEFC-9678S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
	✓		PCS-FE70S	0.39" (10mm)	IP67	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			OSMV-FE62S	0.39" (10mm)	IP65	✓	✓	✓				✓	✓	✓	✓	✓	✓	
			SRLT-FK76S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			HEHD-4LD97S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			HEHD-8LD97S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			HEHD-15LD97S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			TDFP-468S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			TDFP-172S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			ULHE-9519S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			ULHE-9522S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			HEFC-9687S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			ULHE-9561S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓				✓	✓	✓	✓	✓	✓	✓	
✓			ULPS-LN21S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
		✓	DTWP-LN27S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
	✓		CMLP-8707S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
			CMLP-FE78S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
	✓		CMLP-9023S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
✓			HEPS-L642S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓					✓	✓	✓	✓	✓	✓	✓	
✓			HEFC-9677S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓					✓	✓	✓	✓	✓	✓	✓	
✓			ULPS-9033S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓					✓	✓	✓	✓	✓	✓	✓	





Corner Mounting Series

Corner Mounting Series

(Unit: mm)


CM-6363-S



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 16*16mm [0.63*0.63in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10mm [0.31/0.39in.]
- Linear LED Density@milky cover: ≥ 120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]



CM-6363-R



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 16*16mm [0.63*0.63in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10mm [0.31/0.39in.]
- Linear LED Density@milky cover: ≥ 120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 60-70%
- Length of Finished Product: Strip Length+13mm [0.51in.]

CM-7272



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 18.4*18.4mm [0.72*0.72in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥ 240LED/M/Row [73LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+14mm [0.55in.]



Channel and LED Strip Compatability Chart						Corner Mounting		
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	RS-80106-R	RS-80106-S	RS-118
✓			HEFC-9682S	0.2" (5mm)	IP20			
✓			ICBI-9645S	0.24" (6mm)	IP20			
✓			ULHE-9519S	0.32" (8mm)	IP20	✓	✓	
✓			ULHE-9522S	0.32" (8mm)	IP20	✓	✓	
✓			HEFC-9687S	0.32" (8mm)	IP20	✓	✓	
✓			OSMV-FE62S	0.32" (8mm)	IP20	✓	✓	
✓			TDFP-414S	0.32" (8mm)	IP54	✓	✓	
✓			ULPS-9033S	0.39" (10mm)	IP20	✓	✓	
✓			HEFC-9677S	0.39" (10mm)	IP20	✓	✓	
✓			ULHE-9561S	0.39" (10mm)	IP20	✓	✓	
✓			HEP-L624S	0.39" (10mm)	IP20	✓	✓	
	✓		CMLP-9688S	0.39" (10mm)	IP20	✓	✓	
		✓	TUNE-LN28S	0.39" (10mm)	IP20	✓	✓	
		✓	HEFC-9678S	0.39" (10mm)	IP20	✓	✓	




Regular Suspension Series

Regular Suspension Series

(Unit: mm)



RS-80106-R



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 20.3*27mm [0.8*1.06in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 12/15mm [0.47/0.59in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 70-80%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]



RS-80106-S



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 20.3*27mm [0.8*1.06in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 12/15mm [0.47/0.59in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 70-80%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]

RS-118



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: φ30mm [φ1.18in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]





Channel and LED Strip Compatability Chart						Corner Mounting		
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	RS-80106-R	RS-80106-S	RS-118
✓			HEFC-9682S	0.2" (5mm)	IP20			
✓			ICBI-9645S	0.24" (6mm)	IP20			
✓			ULHE-9519S	0.32" (8mm)	IP20			✓
✓			ULHE-9522S	0.32" (8mm)	IP20			✓
✓			HEFC-9687S	0.32" (8mm)	IP20			✓
✓			OSMV-FE62S	0.32" (8mm)	IP20			✓
✓			TDFP-414S	0.32" (8mm)	IP54			✓
✓			ULPS-9033S	0.39" (10mm)	IP20			✓
✓			HEFC-9677S	0.39" (10mm)	IP20			✓
✓			ULHE-9561S	0.39" (10mm)	IP20			✓
✓			HEP-L624S	0.39" (10mm)	IP20			✓
	✓		CMLP-9688S	0.39" (10mm)	IP20			✓
		✓	TUNE-LN28S	0.39" (10mm)	IP20			✓
		✓	HEFC-9678S	0.39" (10mm)	IP20			✓
	✓		PCS-FE70S	0.39" (10mm)	IP67	✓	✓	✓
✓			OSMV-FE62S	0.39" (10mm)	IP65	✓	✓	✓
			SRLT-FK76S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			HEHD-4LD97S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			HEHD-8LD97S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			HEHD-15LD97S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			TDFP-468S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			TDFP-172S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			ULHE-9519S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			ULHE-9522S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			HEFC-9687S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			ULHE-9561S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			ULPS-LN21S	0.47" (12mm)	IP20	✓	✓	✓
		✓	DTWP-LN27S	0.47" (12mm)	IP20	✓	✓	✓
	✓		CMLP-8707S	0.47" (12mm)	IP20	✓	✓	✓
			CMLP-FE78S	0.47" (12mm)	IP20	✓	✓	✓
	✓		CMLP-9023S	0.47" (12mm)	IP20	✓	✓	✓
✓			HEPS-L642S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			HEFC-9677S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			ULPS-9033S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓	✓

In Ground Series

(Unit: mm)

IG-
84102



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 21.3*26.0mm [0.84*1.02in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 20-30%
- Length of Finished Product: Strip Length+13mm [0.51in.]





In Ground Series


Wall Washer Series

(Unit: mm)

WW-
1970




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 48.5*17.7mm [1.9*0.7in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]

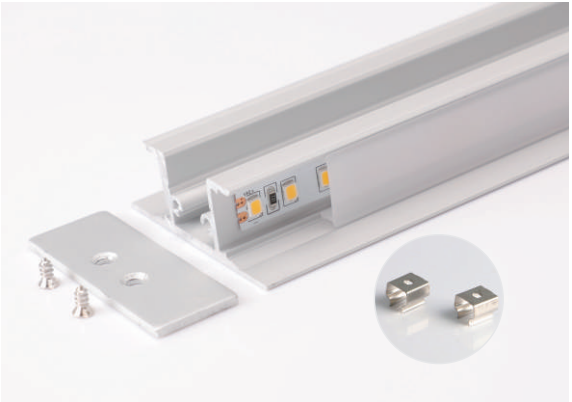

Wall Washer Series


Channel and LED Strip Compatability Chart						Corner Mounting	
STATIC	RGBW	TW	TSLC Tape Family	PRODUCT WIDTH	IP rating	IG-84102	WW-1970
✓			HEFC-9682S	0.2" (5mm)	IP20		
✓			ICBI-9645S	0.24" (6mm)	IP20		
✓			ULHE-9519S	0.32" (8mm)	IP20	✓	✓
✓			ULHE-9522S	0.32" (8mm)	IP20	✓	✓
✓			HEFC-9687S	0.32" (8mm)	IP20	✓	✓
✓			OSMV-FE62S	0.32" (8mm)	IP20	✓	✓
✓			TDFP-414S	0.32" (8mm)	IP54	✓	✓
✓			ULPS-9033S	0.39" (10mm)	IP20	✓	✓
✓			HEFC-9677S	0.39" (10mm)	IP20	✓	✓
✓			ULHE-9561S	0.39" (10mm)	IP20	✓	✓
✓			HEP-L624S	0.39" (10mm)	IP20	✓	✓
	✓		CMLP-9688S	0.39" (10mm)	IP20	✓	✓
		✓	TUNE-LN28S	0.39" (10mm)	IP20	✓	✓
		✓	HEFC-9678S	0.39" (10mm)	IP20	✓	✓
	✓		PCS-FE70S	0.39" (10mm)	IP67		
✓			OSMV-FE62S	0.39" (10mm)	IP65		
			SRLT-FK76S	0.39" (10mm)	IP67 +		
✓			HEHD-4LD97S	0.39" (10mm)	IP67 +		
✓			HEHD-8LD97S	0.39" (10mm)	IP67 +		
✓			HEHD-15LD97S	0.39" (10mm)	IP67 +		
✓			TDFP-468S	0.39" (10mm)	IP67 +		
✓			TDFP-172S	0.39" (10mm)	IP67 +		
✓			ULHE-9519S	0.39" (10mm)	IP65/ IP67plus/ IP68		
✓			ULHE-9522S	0.39" (10mm)	IP65/ IP67plus/ IP68		
✓			HEFC-9687S	0.39" (10mm)	IP65/ IP67plus/ IP68		
✓			ULHE-9561S	0.47" (12mm)	IP65/ IP67plus/ IP68		
✓			ULPS-LN21S	0.47" (12mm)	IP20	✓	✓
		✓	DTWP-LN27S	0.47" (12mm)	IP20	✓	✓
	✓		CMLP-8707S	0.47" (12mm)	IP20	✓	✓
			CMLP-FE78S	0.47" (12mm)	IP20	✓	✓
	✓		CMLP-9023S	0.47" (12mm)	IP20	✓	✓
✓			HEPS-L642S	0.47" (12mm)	IP65/ IP67plus/ IP68		
✓			HEFC-9677S	0.47" (12mm)	IP65/ IP67plus/ IP68		
✓			ULPS-9033S	0.47" (12mm)	IP65/ IP67plus/ IP68		

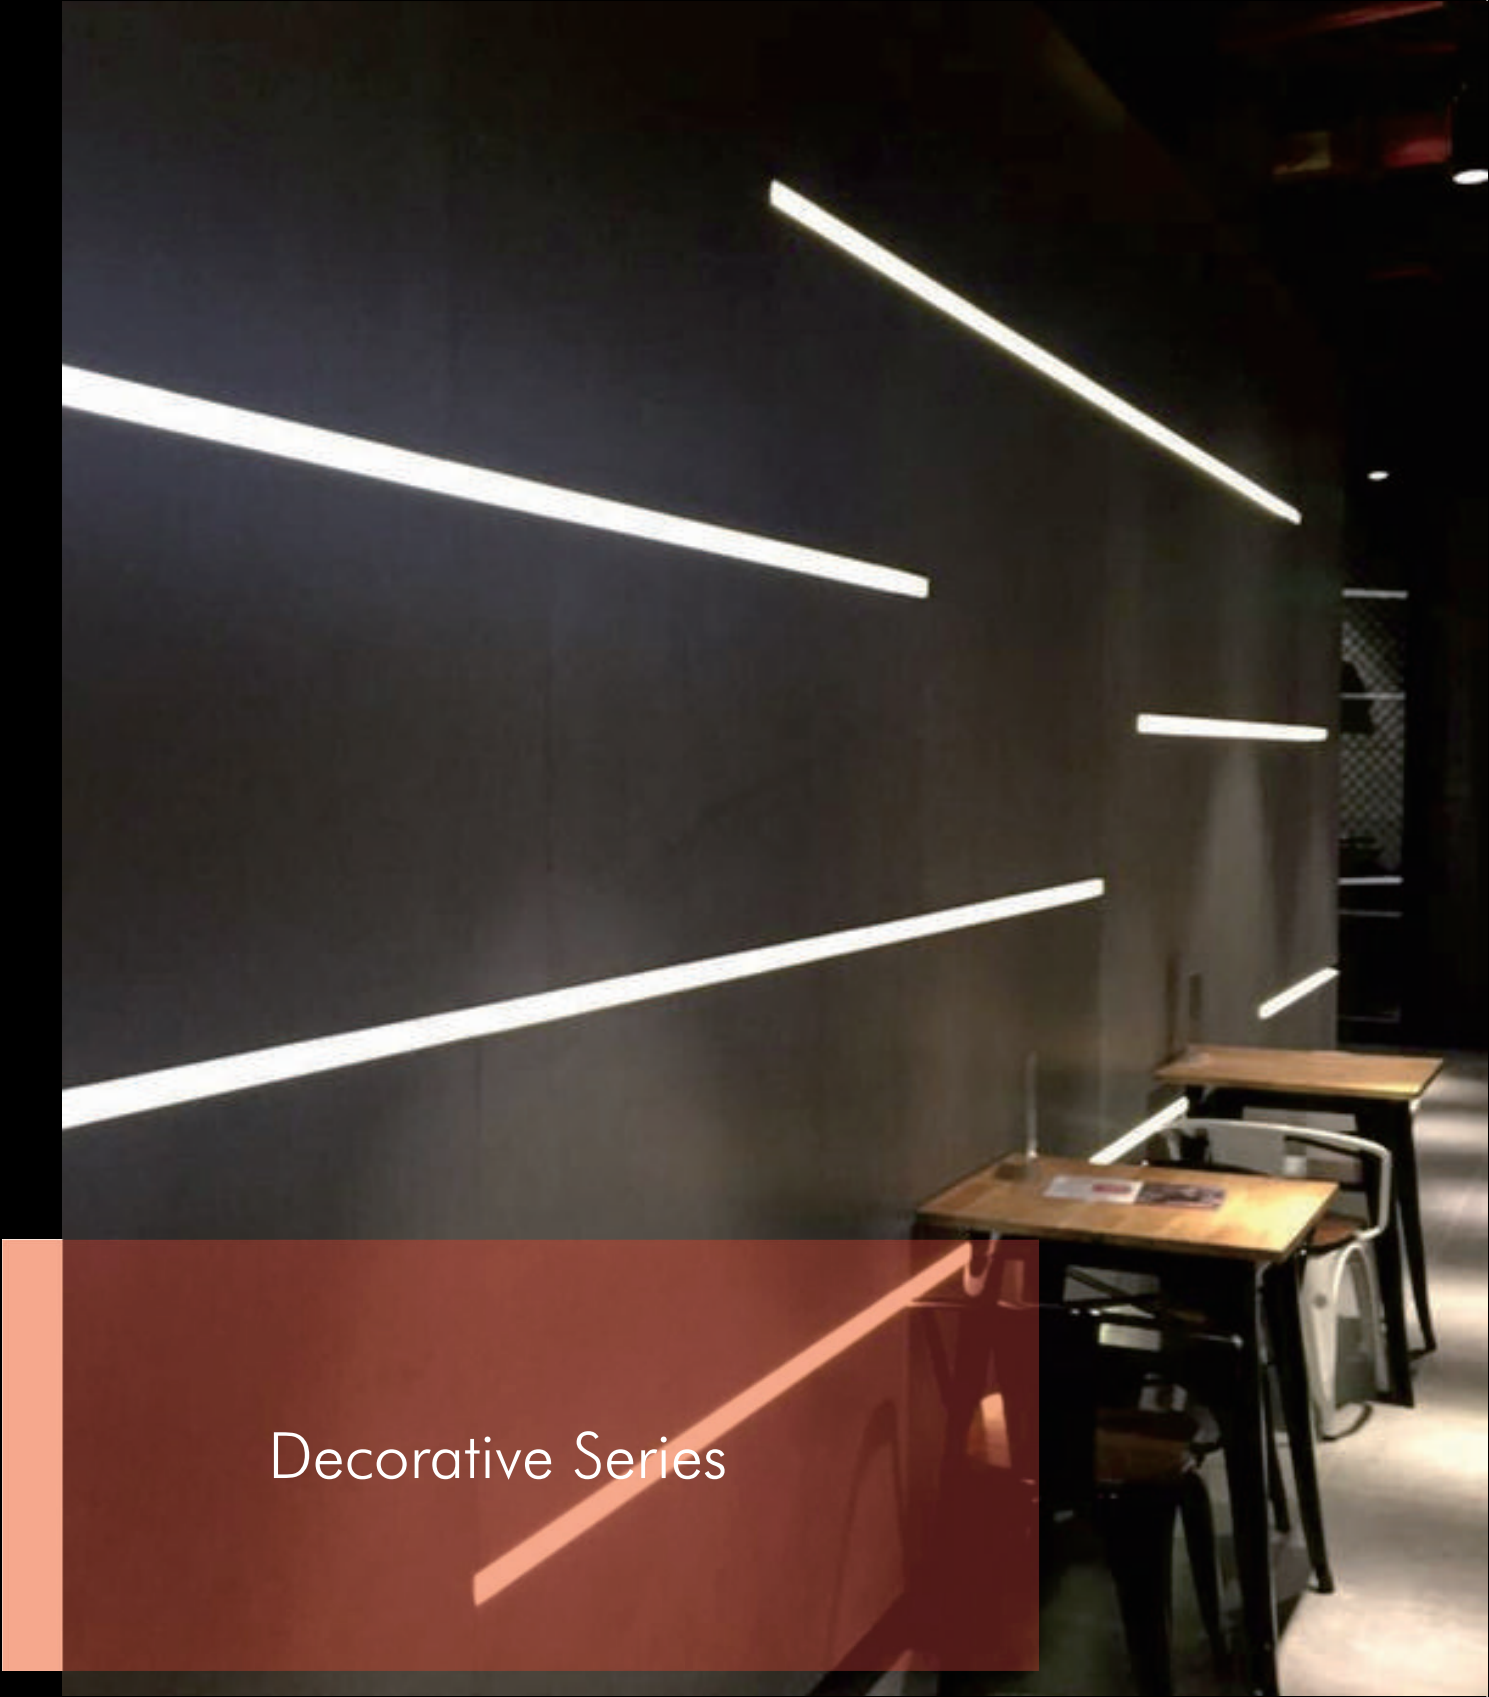


Decorative Series

(Unit: mm)



D-181102



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 46*26mm [1.81*1.02in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+13mm [0.51in.]

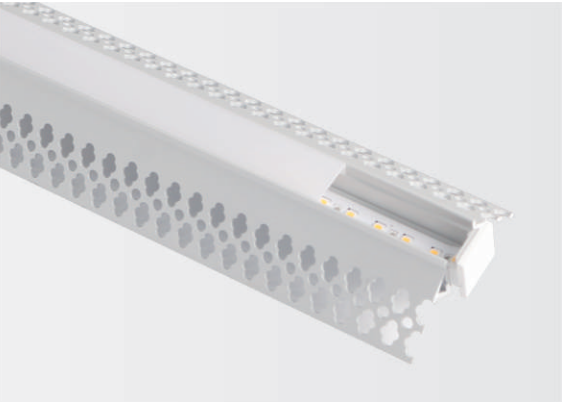

D-209091





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 53*23mm [2.09*0.91in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+13mm [0.51in.]

Decorative Series



(Unit: mm)





D-22059





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 56*15mm [2.2*0.59in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51in.]



D-22059-SB Optional Side Bendable Version

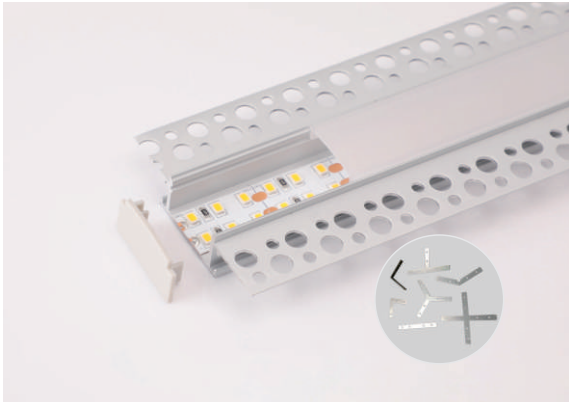




D-24055





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 62*14mm [2.44*0.55in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 15/20mm [0.59/0.79in.]2-rows
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 60-70%
- Length of Finished Product: Strip Length+13mm [0.51in.]

D-24055-SB Optional Side Bendable Version




D-
14045





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 35.5*11.3mm [1.4*0.45in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51in.]




D-14045-SB Optional Side Bendable Version



D-
14045-S



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 35.5*11.3mm [1.4*0.45in.]
- Max. Length: Profile 10M [32.8ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+14mm [0.55in.]

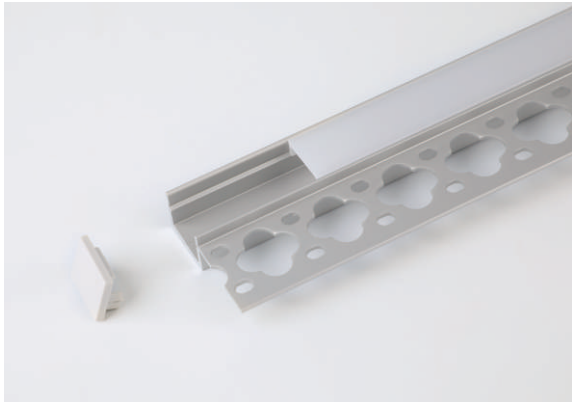



D-
142069



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 36*17.6mm [1.42*0.69in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]





D-
195144



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 49.5*36.7mm [1.95*1.44in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]

D-
35228



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 89*58mm [3.5*2.28in.]
- Max. Length: Profile 10M [32.8ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]




Decorative Series


(Unit: mm)

D-

39827




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 101*68.6mm [3.98*2.7in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+ 13mm [0.51in.]

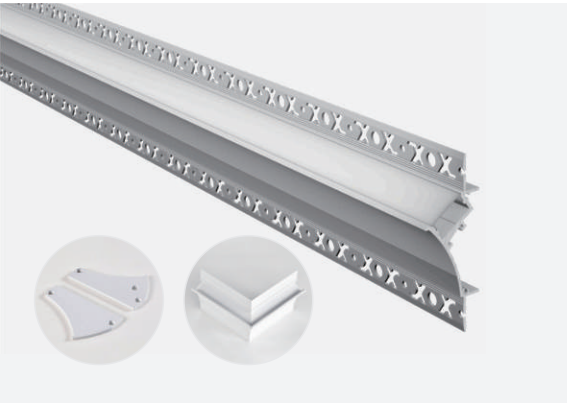

D-


386138



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 98*35mm [3.86*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+ 13mm [0.51in.]

D-

417177



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 106*45mm [4.17*1.77in.]
- Max. Length: Profile 10M [32.8ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover: ≥120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+ 13mm [0.51in.]



Channel and LED Strip Compatability Chart						Decorative										
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	D-181102	D-209091	D-22059	D14045	D14045-S	D-142069	D-195144	D-35228	D-39827	D386138	D417177
✓			HEFC-9682S	0.2" (5mm)	IP20											
✓			ICBI-9645S	0.24" (6mm)	IP20											
✓			ULHE-9519S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			ULHE-9522S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			HEFC-9687S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			OSMV-FE62S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			TDFP-414S	0.32" (8mm)	IP54	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			ULPS-9033S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			HEFC-9677S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			ULHE-9561S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			HEP-L624S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓		CMLP-9688S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
		✓	TUNE-LN28S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
		✓	HEFC-9678S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓		PCS-FE70S	0.39" (10mm)	IP67											
✓			OSMV-FE62S	0.39" (10mm)	IP65											
			SRLT-FK76S	0.39" (10mm)	IP67 +											
✓			HEHD-4LD97S	0.39" (10mm)	IP67 +											
✓			HEHD-8LD97S	0.39" (10mm)	IP67 +											
✓			HEHD-15LD97S	0.39" (10mm)	IP67 +											
✓			TDFP-468S	0.39" (10mm)	IP67 +											
✓			TDFP-172S	0.39" (10mm)	IP67 +											
✓			ULHE-9519S	0.39" (10mm)	IP65/ IP67plus/ IP68											
✓			ULHE-9522S	0.39" (10mm)	IP65/ IP67plus/ IP68											
✓			HEFC-9687S	0.39" (10mm)	IP65/ IP67plus/ IP68											
✓			ULHE-9561S	0.47" (12mm)	IP65/ IP67plus/ IP68											
✓			ULPS-LN21S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
		✓	DTWP-LN27S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓		CMLP-8707S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
			CMLP-FE78S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓		CMLP-9023S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			HEPS-L642S	0.47" (12mm)	IP65/ IP67plus/ IP68		✓									
✓			HEFC-9677S	0.47" (12mm)	IP65/ IP67plus/ IP68		✓									
✓			ULPS-9033S	0.47" (12mm)	IP65/ IP67plus/ IP68		✓									




Office Suspension Series

Office Suspension Series

(Unit: mm)

OS-138




Installation Diagram



Material: Anodized Aluminum 6063
Color: Silver / Black / White
Cover: Regular PC diffuser (milky / transparent / black)
Width*Height: 35*35mm [1.38*1.38in.]
Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
End cap: 2pcs/unit (1pc with hole, 1pc without hole)
Clip/Screw: 2pcs/M [2pcs/39.4in.]
Match Strip Width: 15/20mm [0.59/0.79in.]2-rows
Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
Light Output Rate of Finished Product: 40-50%
Length of Finished Product: Strip Length+13mm [0.51in.]



OS-197




Installation Diagram




Material: Anodized Aluminum 6063
Color: Silver / Black / White
Cover: Regular PC diffuser (milky / transparent / black)
Width*Height: 50*35mm [1.97*1.38in.]
Max. Length: Profile 3M [9.84ft.], cover 10M [32.8ft.]
End cap: 2pcs/unit (1pc with hole, 1pc without hole)
Clip/Screw: 2pcs/M [2pcs/39.4in.]
Match Strip Width: 15*2/20/25mm [0.59*2/0.79/0.98in.]
Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
Light Output Rate of Finished Product: 40-50%
Length of Finished Product: Strip Length+13mm [0.51in.]


OS-295



Installation Diagram



Material: Anodized Aluminum 6063
Color: Silver / Black / White
Cover: Regular PC diffuser (milky / transparent / black)
Width*Height: 75*35mm [2.95*1.38in.]
Max. Length: Profile 3M [9.84ft.], cover 10M [32.8ft.]
End cap: 2pcs/unit (1pc with hole, 1pc without hole)
Clip/Screw: 2pcs/M [2pcs/39.4in.]
Match Strip Width: 15*3/20*2/25*2mm[0.59*3/0.79*2/0.98*2in.]
Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
Light Output Rate of Finished Product: 50-60%
Length of Finished Product: Strip Length+13mm [0.51in.]




Office Recessed Mounting Series

Office Recessed Mounting Series

(Unit: mm)



ORM-197



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 50*35mm [1.97*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15/20mm [0.59/0.79in.] 2-rows
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+20mm [0.79in.]





ORM-256



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 65*35mm [2.56*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 10M [32.8ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15*2/20/25mm [0.59*2/0.79/0.98in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+30mm [1.18in.]

ORM-354



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width*Height: 90*35mm [3.54*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 10M [32.8ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15*3/20*3/25*2mm [0.59*4/0.79*3/0.98*2in.]
- Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+30mm [1.18in.]





Mounting Accessory Series for Waterproof Strip

Mounting Accessory Series for Waterproof Strip

(Unit: mm)

MAWS-5030



Material: Anodized Aluminum 6063

Color: Silver / Black / White

Cover: /

Width*Height: 12.8*8.5mm [0.5*0.3in.]

Max. Length: Profile 3M [9.84ft.]

End cap: /

Clip/Screw: 3pcs/M [3pcs/39.4in.]

Match Strip Width: Waterproof strip in 10mm [0.4in.]



Linear LED Density@milky cover: /

Light Output Rate of Finished Product: Same as Strip

Length of Finished Product: Same as Strip



MAWS-6030



Material: Anodized Aluminum 6063

Color: Silver / Black / White

Cover: /

Width*Height: 14.8*8.5mm [0.6*0.3in.]

Max. Length: Profile 3M [9.84ft.]

End cap: /


Clip/Screw: 3pcs/M [3pcs/39.4in.]

Match Strip Width: Waterproof strip in 12mm [0.47in.]

Linear LED Density@milky cover: /

Light Output Rate of Finished Product: Same as Strip

Length of Finished Product: Same as Strip

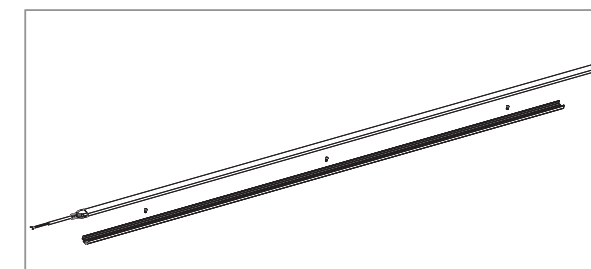

Mounting Accessory Series for Waterproof Strip (Unit: mm)

MAWS-5530

Material: Anodized Aluminum 6063

Color: Silver

Cover: Regular PC diffuser (milky)

Width*Height: 13.9*8.5mm [0.55*0.3in.]

Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]

End cap: /


Clip/Screw: 3pcs/M [3pcs/39.4in.]

Match Strip Width: Waterproof strip in 10mm [0.4in.]

Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]

Light Output Rate of Finished Product: 70-80%

Length of Finished Product: Same as Strip

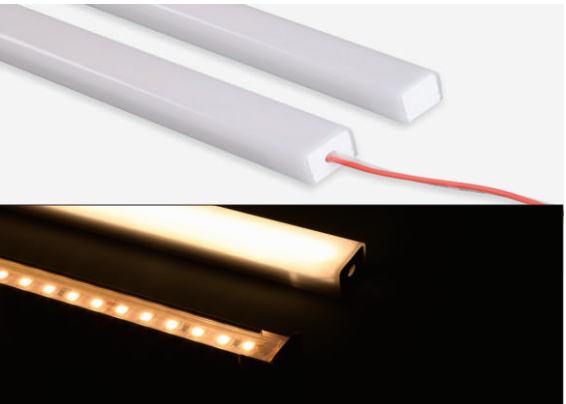

MAWS-6330

Material: Anodized Aluminum 6063

Color: Silver

Cover: Regular PC diffuser (milky)

Width*Height: 16*8.5mm [0.63*0.3in.]

Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]

End cap: /

Clip/Screw: 3pcs/M [3pcs/39.4in.]

Match Strip Width: Waterproof strip in 12mm [0.47in.]

Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]

Light Output Rate of Finished Product: 70-80%

Length of Finished Product: Same as Strip

MAWS-6930

Material: Anodized Aluminum 6063

Color: Silver

Cover: Regular PC diffuser (milky)

Width*Height: 17.6*8.5mm [0.69*0.3in.]

Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]

End cap: /

Clip/Screw: 3pcs/M [3pcs/39.4in.]

Match Strip Width: Waterproof strip in 14mm [0.55in.]

Linear LED Density@milky cover: $\geq 120\text{LED/M/Row}$ [36LED/ft.]

Light Output Rate of Finished Product: 70-80%

Length of Finished Product: Same as Strip

