

Modular Railing Systems

Square Stainless Illuminated Handrail

Application

Smartlights by Smart Railing is a Modular System for use in interior or exterior commercial and residential applications. Perfect for a new or retrofit application. The LED illuminated handrail produces a continuous stream of light adding safety and atmosphere. TALL wiring is concealed. The LEDs are simple to install and click into place. The 24v or 48v system uses IP67 LED's for outdoor and IP20 LED's for indoor applications. Dimmable power supplies make this ideal for darker interior applications such as theaters and concert halls. The system is UL listed.

Railing

Smartlights Square is available in 304 or 316 stainless steel in 1.9" and 1.66" diameter. Depending on railing system, this can be wall mounted, post mounted or glass mounted. Choose from frosted or clear lens. Infill choices include cables, glass or bars. The railing provides a seamless look and is vandal resistant. Railing solutions require no welding and can be used on stairs, ramps balconies and more. We have both indoor and outdoor solutions.

The Round illuminated cap rail is wall or post mounted. Cable duct is integrated for the LED strips. Choose from a variety of handrail brackets and post tube adapters as well as transparent or frosted lenses. The circular handrail meets the ADAAG (Americans with Disability Act Accessibility Guidelines).

LEDs

LED Strips are recessed into the underside of the handrail. The LED Strips are part of the 24v system, rated over 50,000 hours and you can choose from 1.7w, 2.4w and 4.6w/ft. Standard color temperatures in stock are 27k, 30k, 35k and 40k.

24v Driver

Input voltage: 120/277vac

Output voltage: 24vdc

Wattage: 96w

Control: 5 in one dimming including ELV, Reverse Phase, Forward Phase and 0-10V dimming

Damp and Dry location rated

UL Class 2 output for safe operation

Input frequency: 50/60Hz

Installation




The Smartlights system is modular and designed for simple assembly and installation.

Certifications

UL, cULus, ANSI, ADA

How to Specify

The Smart railing systems are modular and each system is custom designed for your specific project requirements. Cap rails come in 16'-4" lengths and are cut in the field to ensure proper fit. We require drawings with dimensions and complete description of railing requirements to create the proper BOM for your project.

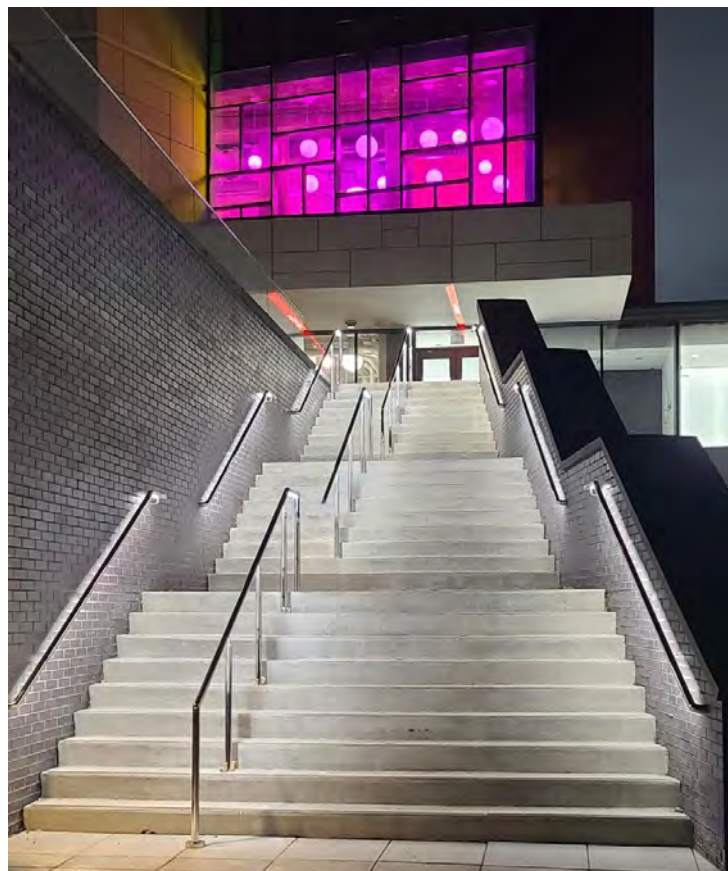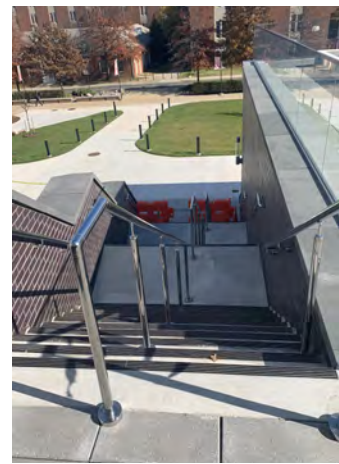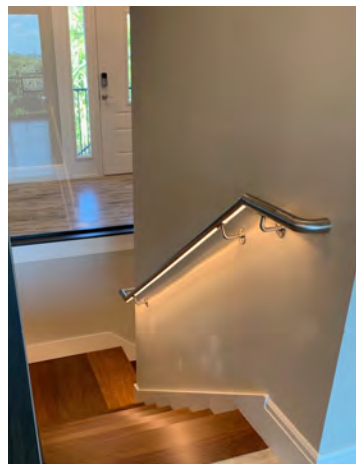

SQUARE ILLUMINATED HANDRAIL

SPECIFYING FORM

Date: _____

Type: _____

Project: _____

Firm: _____


CREATE YOUR RAILING

Ex. IS316-1.57-PM-40-S-F-24-N

TYPE		DIAMETER		MOUNTING		CCT	
IS316	Square 316 Stainless	1.57"	1.57"x1.57" diameter	PM	Post mounted	27	27
IS304	Square 304 Stainless			PMC	Concrete embedded post	30	30
				WM	Wall mounted	35	35
						40	40

BEAM		LENS		VOLTAGE		INFILL	
S	Symmetric 120°	F	Frosted	24	24v	N	None
		C	Clear			C	Cable
						B	Bars
						G	Glass

* glass by others

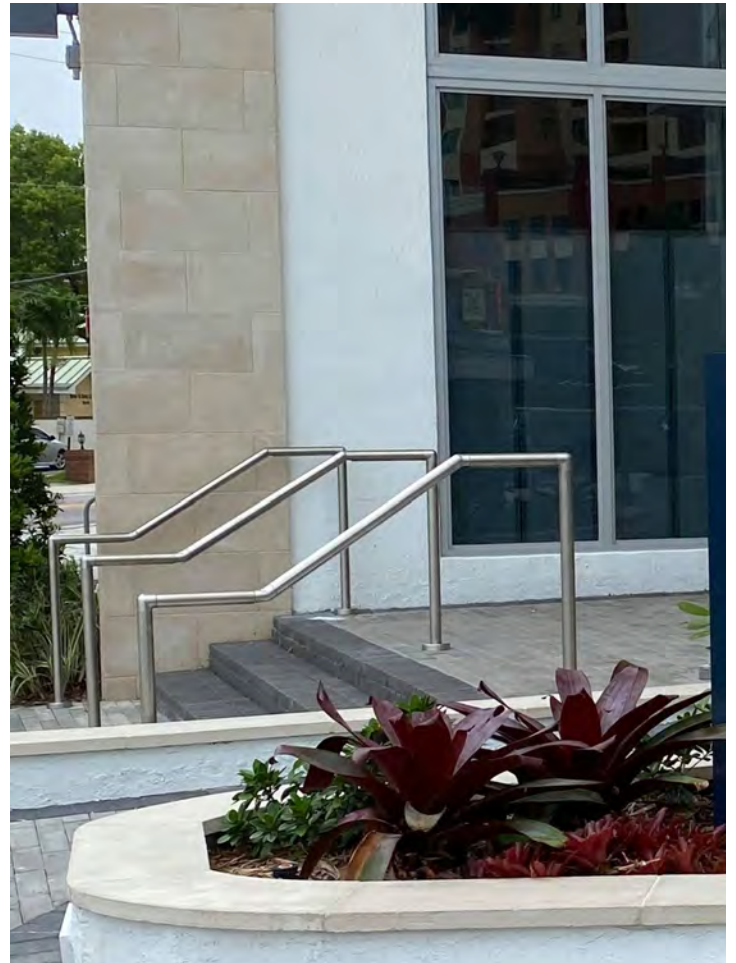

ILLUMINATED HANDRAIL

SPECIFICATIONS

Date:


Type:

Project:




Firm:

Modular Railing Systems


Symmetric Light output

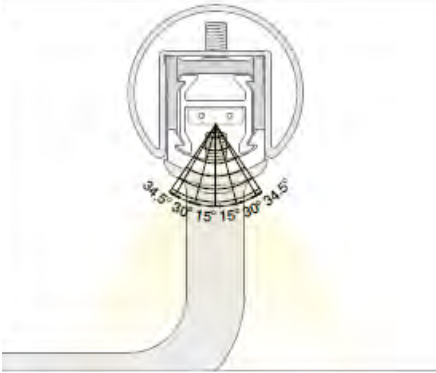

Concealed Wires

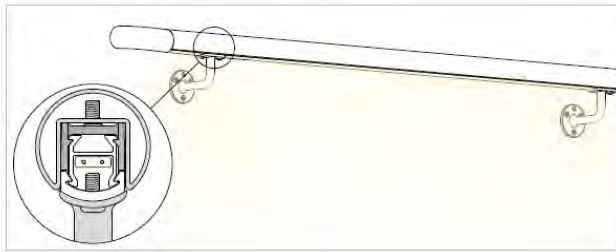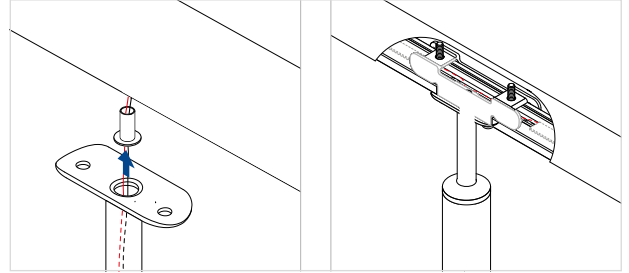

Profiles

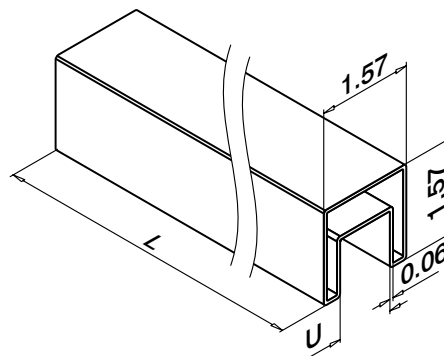

ILLUMINATED HANDRAIL

COMPONENT EXAMPLES

Date:

Type:

Project:

Firm:

Handrail Mounting and Bracket options



Adjustable Post Mount




Fixed Post Mount



Post mount bracket

Corner and Stairway options



90° Connectors



Adjustable Connectors for Stairs



Tube to Cap Rail Connectors

End and Return options



End Fitting



End Cap

Infill options



Bar Infill



Cable Infill



Glass Infill Clamp



Glass Infill Clamp

ILLUMINATED HANDRAIL

Date:

Type:


Project:

Firm:

RAILING EXAMPLES

Modular Railing Systems

POST MOUNTED STAIRWAY EXAMPLE

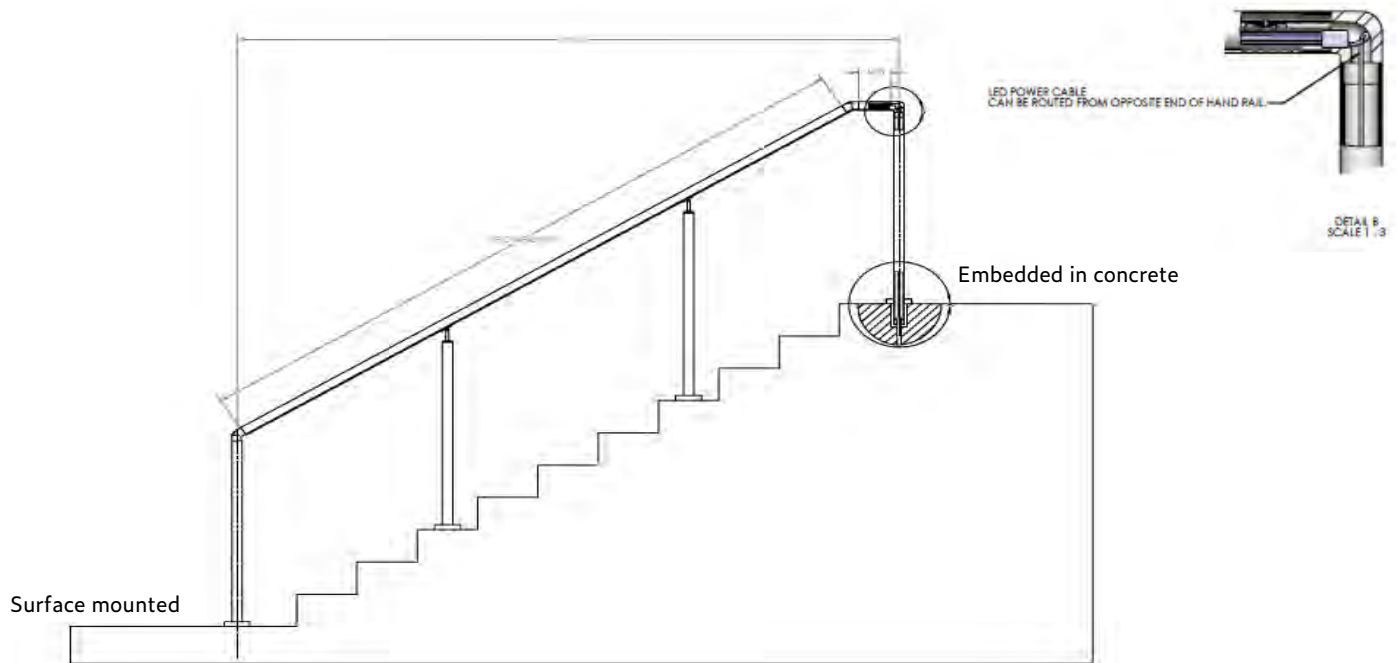

WALL MOUNTED STAIRWAY EXAMPLE

