


AC Series | Direct Wire 120V - 4.3w/ft. - High-Efficacy

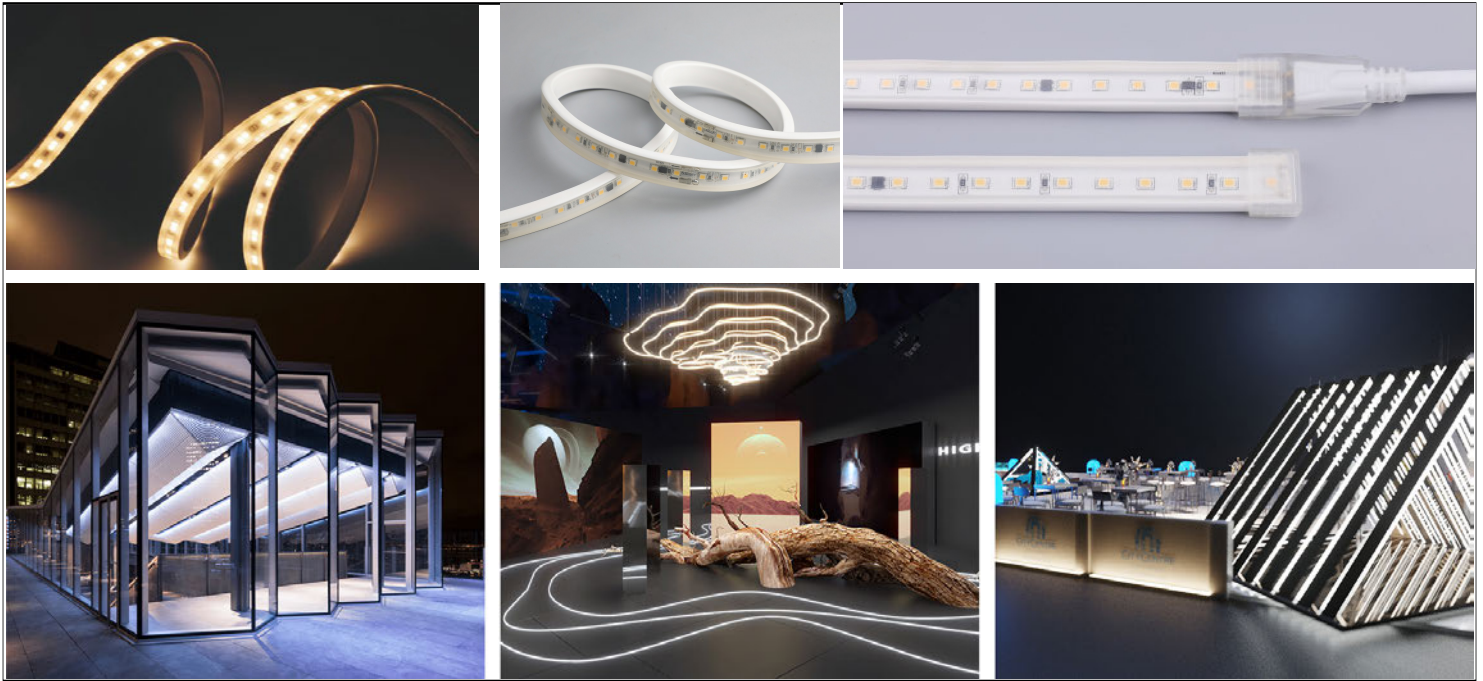

Application

This flexible, 120v strip is ideal for high-end architectural, lighting applications in residential, retail, hospitality and landscape.

Features

- 24 LEDs/foot
- Available in 2700k, 3000k, 3500k, 4000k, and 5000k
- 80+ or 90+ CRI
- Lumen Output: 440lm/ft to 500lm/ft
- Able to cut every 4"
- Max 164ft run length
- Available in IP65 Outdoor & IP40 Indoor
- Dimmable PWM
- UL listed for indoor dry / wet locations
- 50,000 hours rated lifespan
- Over-voltage, over-current and over temperature protection with on-board smart IC driver

FSAC

Introducing The Smart Lighting Company's newest upgrade to LED Tape technology! Our 120vac flexible top-bend high-performance lighting with run lengths up to 164ft and is IP65 rated for indoor or outdoor wet locations. Advanced PVC raw material exclusive for outdoor usage, with strong weather resistance in UV resistant and flameproof.

Easily customizable with cutting sections every 4 inches, The FSAC series is dimmable, with five different options for color temperature. The Patent driverless design, with on-board constant current IC driver and rectifier, allows for direct AC power supply without an external driver.



Specifications and Performance

	FSAC
Watts per Foot	4.3w/ft.
Max Run Length	16.4ft
Cuttable	4"
Lumens per Foot	385-440lm
Lumens per Watt	90-103lm/w
CRI	80+
Input Voltage	120vac
Beam Spread	120°
LED Lifespan	L70 ≥50,000 @ Tc ≤ 65
Dimming	PWM
Dimensions	IP65 (0.65" X 0.28")
CCT	2700k, 3000k, 3500k, 4000k, 5000k, 6500k
Operating Temp	-4°F to 113°F (-20°C to 45°C)
Ambient Temp	-4°F to 113°F (-20°C to 45°C)
Environment	IP65
Warranty	5 year (indoor) 3 Year (outdoor)
Certifications	ETL, RoHS, LM-80, TM-21
LEDs/ft	24 LED's/ ft
SCDM	3 Step, 1 Bin
Mounting	Clips or channel



Ordering Information

Example: FSAC-4.3-xxK-xxL-xxIP-xxCRI-120vac

Max run 164ft

Part No.	Watts/ft		Color Temp		Length		IP Rating		CRI		Voltage	
FSAC	4.3	4.3w/ft.	27	27 00k	164	164.ft	IP65	Outdoor	80	80+	AC	120VAC
			30	3000k								
			35	3500k								
			40	4000k								
			50	5000k								

Lighting Distribution

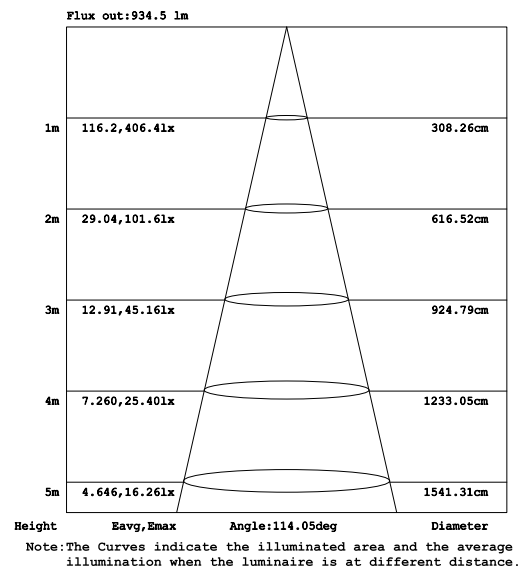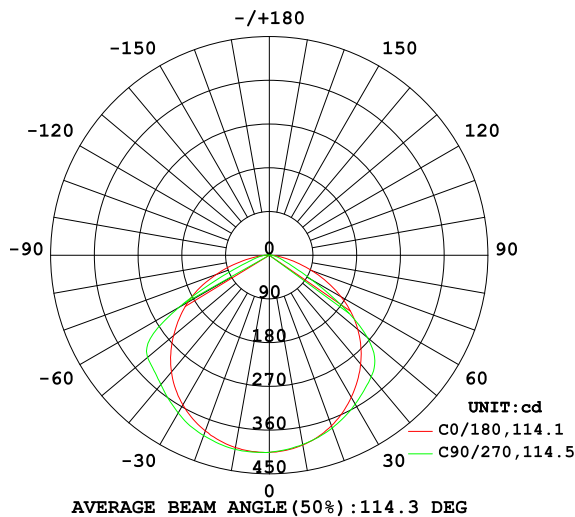


Accessories

Item	Part No.	Specification	Photo	Standard Usage
1	FA-ZJ2-CX00-0137	Wire and end cap attached to strip, white SJTW cable, L=500mm, with American Plug, IP65		As Power Cable
2	FA-ZJ2-CX00-0359	Wire and end cap attached to strip, white SJTW cable, L=500mm, hardwire without American Plug, IP65		As Power Cable
Connection Accessory				
Item	Part No.	Specification	Photo	Standard Usage
2	FA-PJ2-CX00-0379	Jumper Connector (L=0.5FT), 1pcs		For tape to tape connection
3	FA-PJ2-CX00-0380	Jumper Connector (L=1FT), 1pcs		For tape to tape connection
4	FA-PJ2-LJ00-0015	Splice Connector, 1pcs		For tape to tape connection
5	FA-PJ2-LJ00-0019	Right/Left Corner Connector, 1pcs		For tape to tape connection
Installation Accessories				
Item	Part No.	Specification	Photo	Standard Usage
6	FA-PJ2-AZ00-0058	Mounting Bracket and screw kit, 2pcs bracket/kit		For installation
7	FA-PJ2-AZ00-0083	Aluminum channel, flat version, with transparent cover, L=1M		For installation
8	FA-PJ2-AZ00-0148	Aluminum channel, tall version, with transparent cover, L=1M		For installation
9	FA-EZ2-BX00-00-0000	Optional IP66 5KV surge protection device (SPD) such as lightning protection for outdoor application (For Hardwire UL1598 Version).		For protection

Hardwire Diagram

Front View

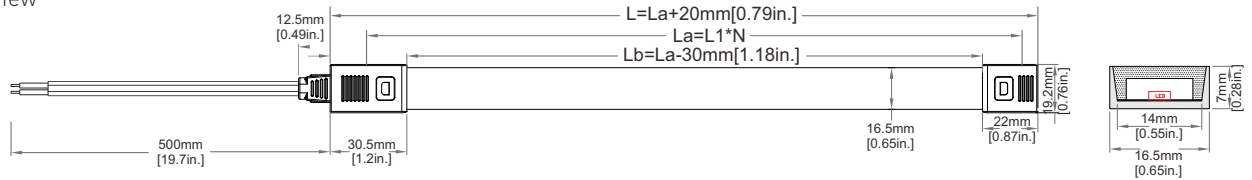


Lateral View




L: Total Length, La: Strip Length, Lb: Light Emitting Length, L1: Strip Increment, N: Quantity in 1,2,3,.....

Dry IP40

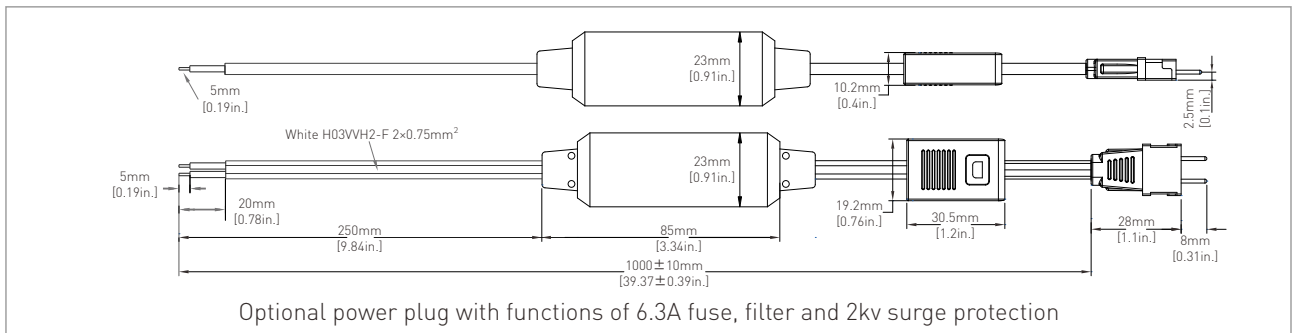

Front View

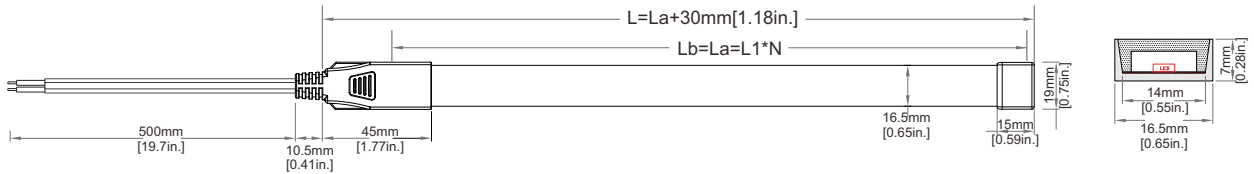


Lateral View





L: Total Length, La: Strip Length, Lb: Light Emitting Length, L1: Strip Increment, N: Quantity in 1,2,3,.....

Wet IP65


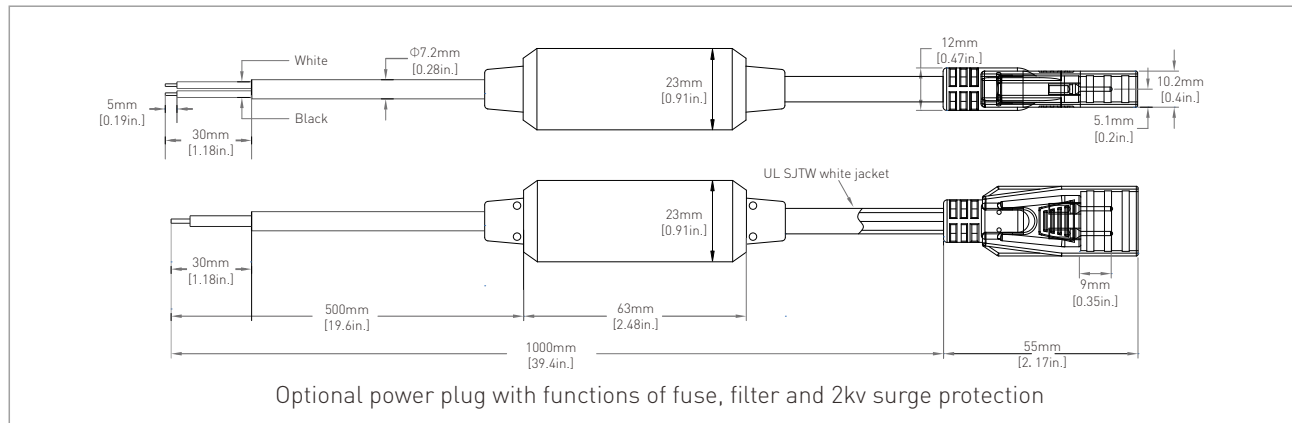


Plug-in Diagram

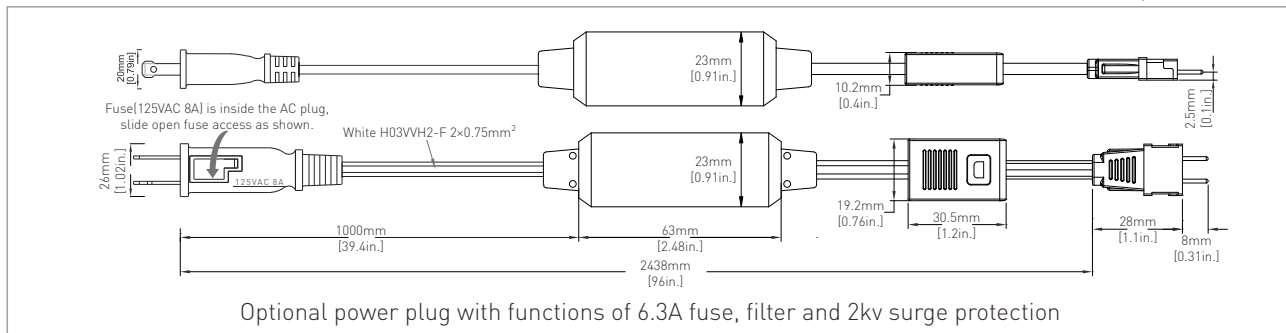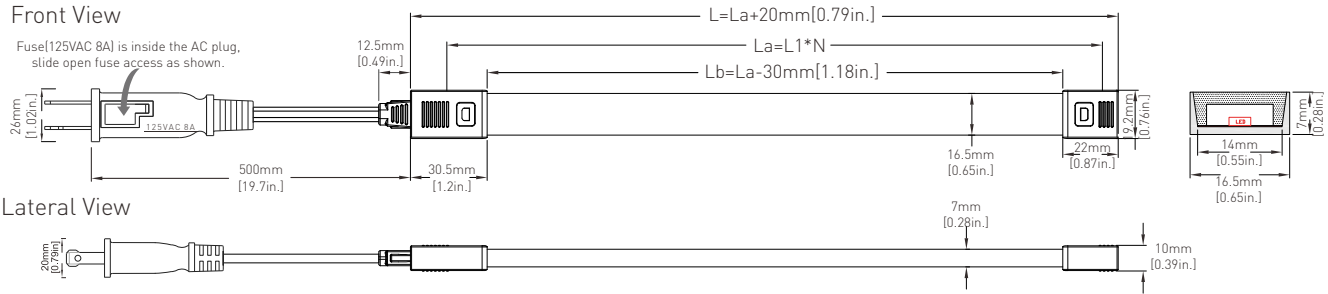

L: Total Length, La: Strip Length, Lb: Light Emitting Length, L1: Strip Increment, N: Quantity in 1,2,3.....


Dry IP40

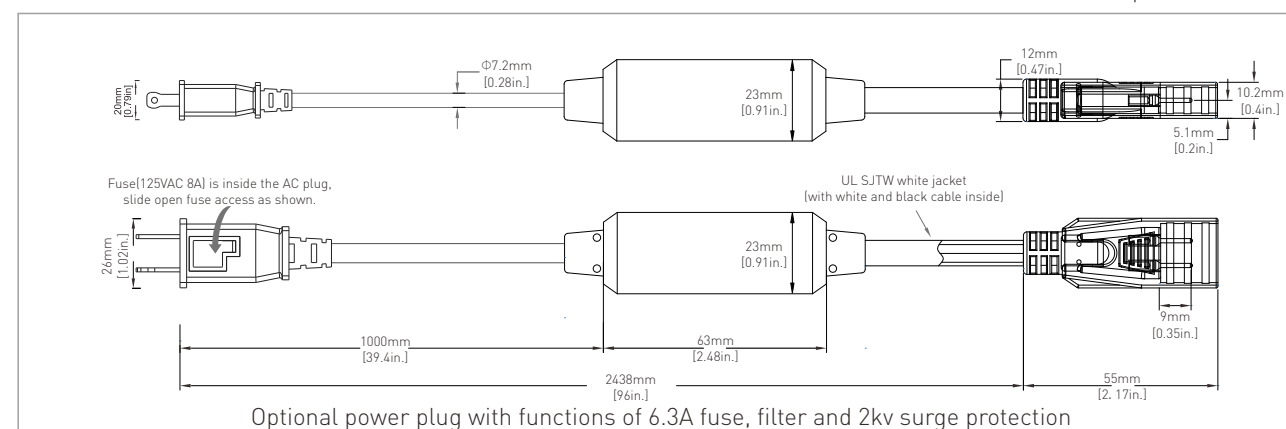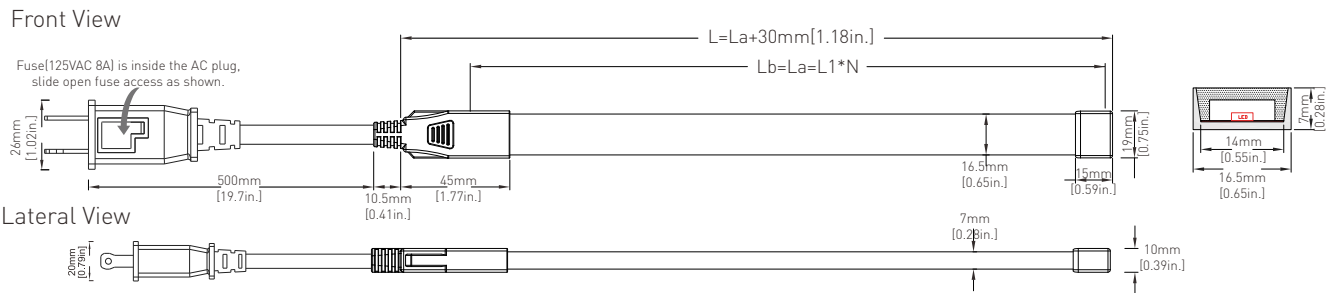


L: Total Length, La: Strip Length, Lb: Light Emitting Length, L1: Strip Increment, N: Quantity in 1,2,3.....

Wet IP65


Assembly Accessories

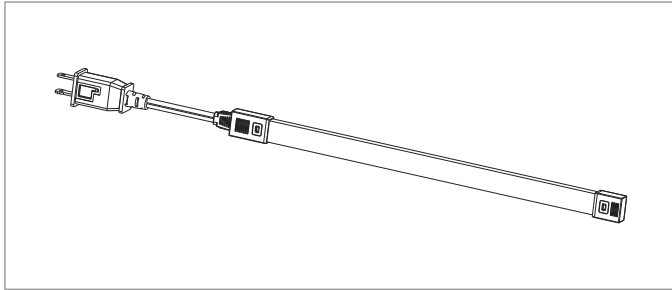


IP40 (Strip Body)

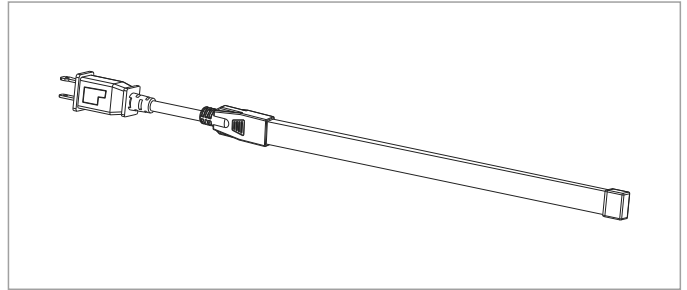




IP65 (Strip Body)

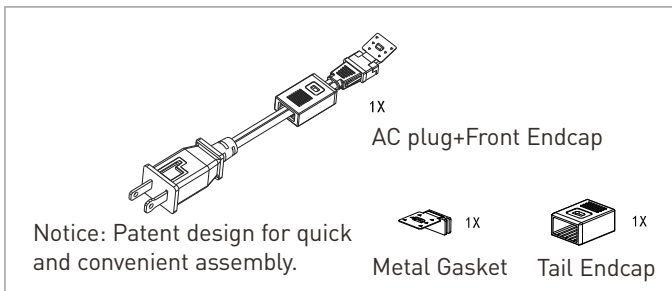


Jumper

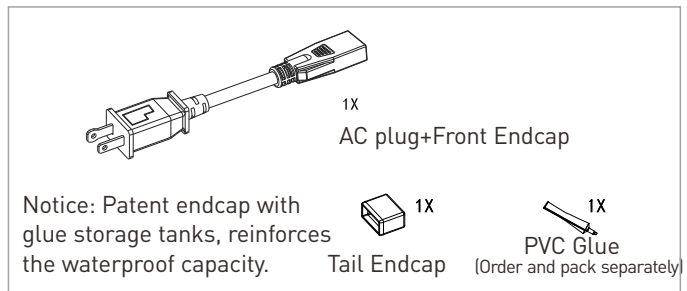


Jumper

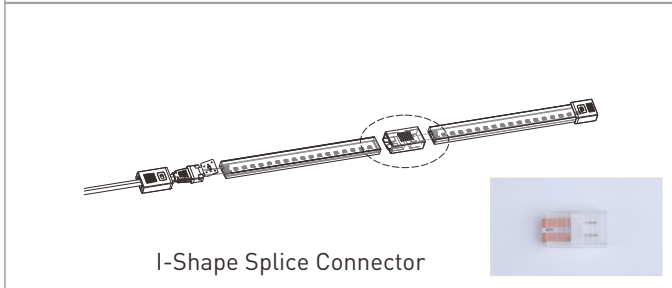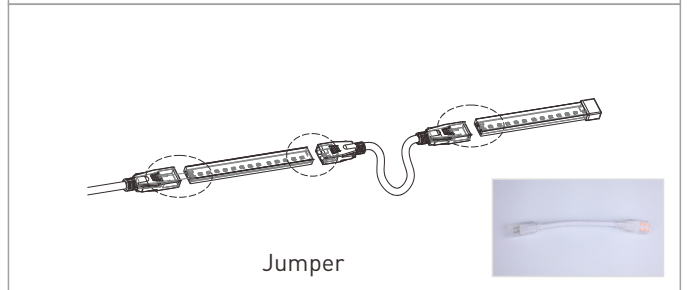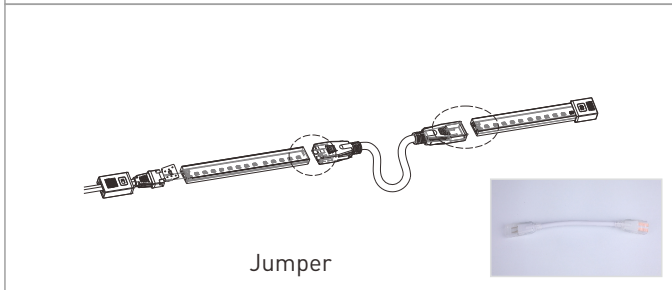


I-Shape Splice Connector

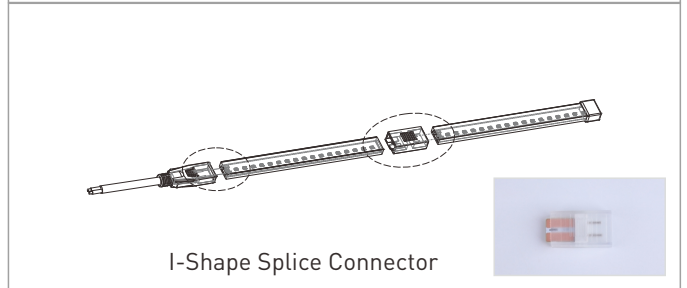

I-Shape Splice Connector

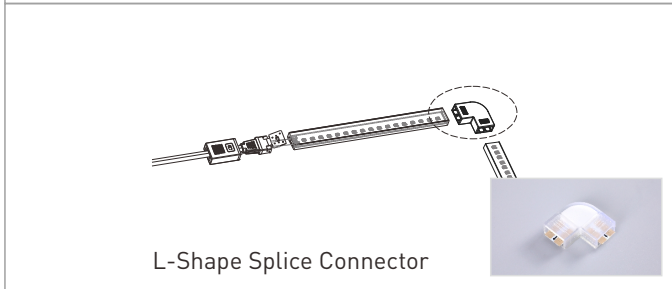

L-Shape Splice Connector

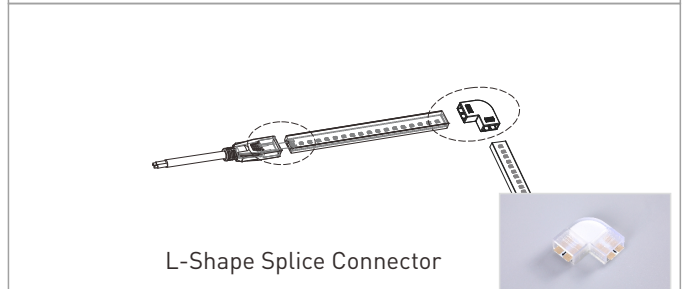

L-Shape Splice Connector

IP40 (Accessories Pack)

IP65 (Accessories Pack)

- Hardwire version complied with UL1598 -
IMPORTANT SAFETY INSTRUCTIONS

- a) "READ AND FOLLOW ALL SAFETY INSTRUCTIONS"
- b) "Do not cover this product as the covering may cause the flexible light to overheat and melt or ignite."
- c) "Do not operate with the flexible light tightly coiled".d) "Do not puncture, cut, shorten, or splice the flexible lighting."
- e) "Do not route the cord or flexible lighting through walls, doors, windows or any like part of the building structure."
- f) "Do not use if there is any damage to the light or cord insulation. Inspect periodically."g) "Do not submerge flexible light in liquids, or use the product in the vicinity of standing water or other liquids."
- h) "Secure this flexible light using only the hangers or clips provided. Do not secure this product or its cord with staples, nails, or like means that may damage the insulation or permanently attach to the building structure."
- i) "Do not subject flexible lighting to continuous flexing."

"SAVE THESE INSTRUCTIONS"

WARNING:

When using outdoor use portable lighting products, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following:

Read All Instructions

- a) Ground Fault Circuit Interrupter (GFCI) protection should be provided on the circuits or outlet to be used for the outdoor use flexible lighting product. Receptacles are available having built-in GFCI protection for this measure of safety.

Caution

