


PRODUCT SPECIFICATION

LINEAR IN-GROUND LIGHT

Recessed In-ground & Ceiling

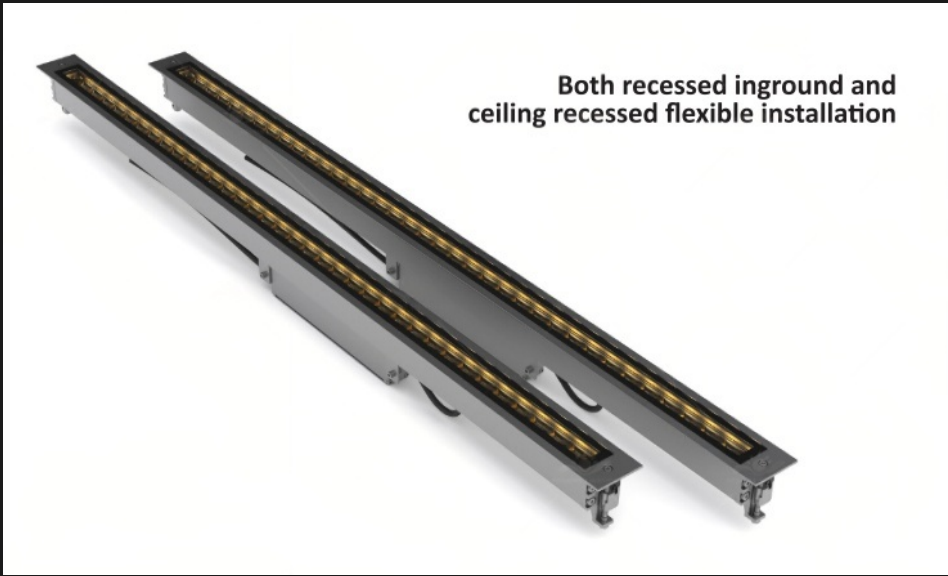

Both recessed inground and ceiling recessed flexible installation

- IP67
- IK09
- CE
- RoHS
- 3G VIB

Products and specifications are subject to change without notice.


DESCRIPTION

The LIG-K13 Linear In-Ground Light is designed with a dual-installation structure. It can be installed recessed into the ground or ceiling recessed on the ceiling, offering excellent flexibility for different project requirements. Rated IP67 for full protection against dust and temporary water immersion, it is ideal for open plazas, walkways, facades, and podium levels. Great for Building facades, eaves, under bridges, passageways, architectural ledges, and commercial complex exteriors. The sealing structure maintains long-term waterproof reliability even in harsh outdoor conditions including high temperature, humidity, and heavy rainfall.

DIMENSIONS

- IP67
- IK09
- CE
- RoHS
- 3G VIBRATION

Length Options	11.8 in (300 mm) / 19.7 in (500 mm) / 39.4 in (1,000 mm)
Width	2.17 in (55 mm)
Height	3.39 in (86 mm)
Weight	~2.0 lb/ft (3.0 kg/m)
Light Source	CREE / OSRAM / Lumileds
Power Options	18 W/m · 24 W/m · 30 W/m (max)



ON / OFF

DC 24V

DMX

CE


RoHS

ETL

3 YEARS

FEATURES — MATERIALS & FINISH

Housing Material	Extruded Aluminum 6063
Lens Material	Clear or Frosted Tempered Glass
Hardware Material	316 Stainless Steel
Gasket Material	Silicone
Surface Finish	Anodized Oxidation
Weight	~2.0 lb/ft (3.0 kg/m)
Light Source	CREE / OSRAM / Lumileds
Power Options	18 W/m · 24 W/m · 30 W/m (max)
Color / Color Temp	Monochromatic (W / R / G / B / A / Y) — RGB — RGBW — RGBA
Optics	8° · 15° · 30° · 45° · 60° · 10°×40° · 20°×60° · Asymmetric
Power Consumption	Max 30 W/m (approx. 10 W/ft); 24 W/m and 18 W/m options available
Delivered Output	70 lm/W (white) · 30 lm/W (RGB color)
Lumen Maintenance	L80B20 @ 50,000 hrs, Ta 25°C (77°F)
Color Consistency	3 SDCM
Color Rendering	CRI 80+

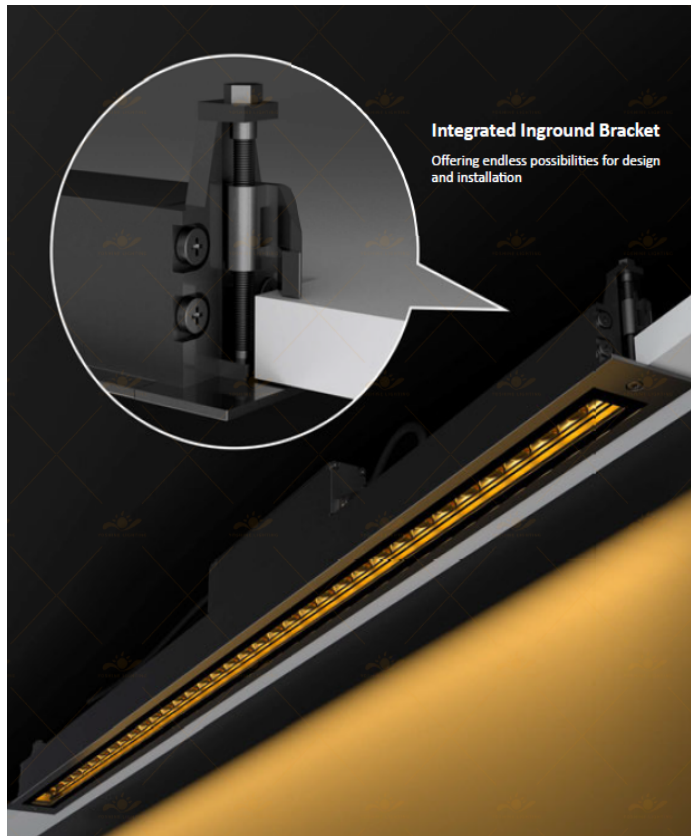

ELECTRICAL SPECIFICATIONS

Voltage	AC 100–240V / DC 24V	Ingress Protection	IP67 — Wet Location Rated
Fixture Cable	Power & data cable	Impact Resistance	IK09
Control	DMX / DALI / CASAMBI	Operating Temp	-4°F to 122°F (-20°C to 50°C)
Resolution	3-ch (RGB) or 4-ch (RGBW / RGBA)	Storage Temp	-4°F to 140°F (-20°C to 60°C)
Power Consumption	Max 12 W/ft (36 W/m)	Certifications	CE · RoHS · 3G Vibration Rating

ANTI-GLARE ACCESSORIES (ORDER SEPARATELY)

Honeycomb Louver

Unit: LIG-K13-HL

Honeycomb cell structure provides superior glare control while maintaining high-quality light transmission. Best for facades and commercial areas.

T-Connector

Unit: LIG-T-Connector


Allows branch connections off the main lighting run. Supports T-junction layouts in complex installations.

CABLES & CONNECTORS (ORDER SEPARATELY)

Description	Unit Number	Length	Notes
Extension / Jumper Cable	LIG-JC-5	19.7 in (50 cm)	Available in black. Specify UL or CE certification.
Extension / Jumper Cable	LIG-JC-10	39.4 in (100 cm)	Suitable for dimming/data and non-dimming applications.
Extension / Jumper Cable	LIG-JC-15	59.1 in (150 cm)	
Power Cable	LIG-WL-3	11.8 in (30 cm)	Lead-in / power cable
T-Connector	LIG-T-Connector	—	Branch junction connector
End Cap	LIG-EC	—	End-of-run termination

Note: Joiners add voltage drops. Consult factory to confirm impact on run length. Use joiners to connect and lengthen jumper cables.

COMPONENT DIAGRAM — EXPLODED VIEW

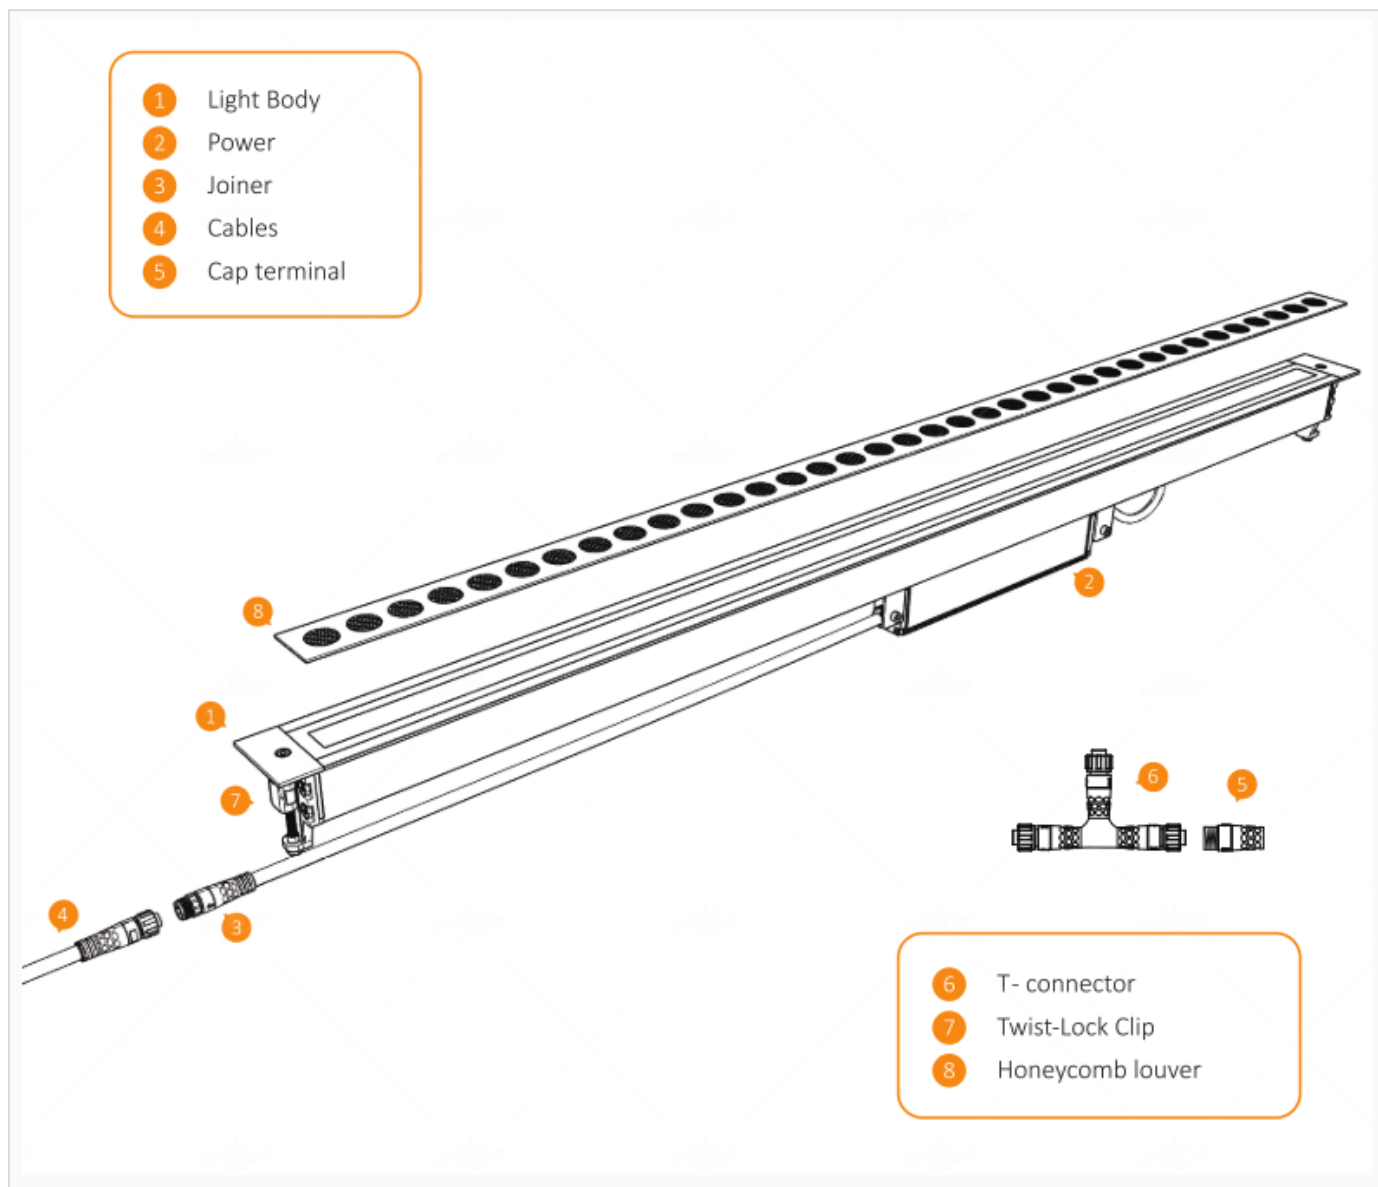

ORDERING CODE BUILDER

Example: LIG-K13AC-1-30-A-X-27-15-GR-HL

① **Item**

LIG-K13AC — 100-240VAC
LIG-K13DC — 24VDC

② **Length**

1 — 11.8 in (300 mm)
2 — 19.7 in (500 mm)
3 — 39.4 in (1,000 mm)

③ **Power**

30 — 30 W/m (9.14w/ft)
24 — 24 W/m (7.32w/ft)
18 — 18 W/m (5.49w/ft)

④ **Fixture Type**

A — Alternating

⑤ **Dimming**

X — DMX

⑥ **Color**

27 — 2700 K
30 — 3000 K
35 — 3500 K
40 — 4000 K
60 — 6000 K
RB — RGB
RW — RGBW

⑦ **Beam Angle**

8 — 8°
15 — 15°
30 — 30°
45 — 45°
60 — 60°
1040 — 10°×40°
2060 — 20°×60°
ASY -- Asymmetric

⑧ **Finish**

GR — Gray
BK — Black
* Custom finishes available.

⑨ **Option**

HL — Honeycomb Louver
NA — None

Note: Items marked * are customizable. Consult The Smart Lighting Co. for custom colors, beam angles, or special configurations.

INSTALLATION — MOUNTING THE LINEAR INGROUND LIGHT

STEP 1 — LAY CABLES & DRAINAGE SETUP

Per project design, lay electrical cables at designated light positions. Install a drainage pipe or other drainage facilities to prevent water accumulation around the fixture. Groove dimensions: 2.17 in wide × 3.39 in deep (55 mm × 86 mm). Also supports ceiling recessed installation.

STEP 2 — PRE-EMBEDDED SLEEVE INSTALLATION

1 **Cut Groove**

Cut a groove at the designated installation position: 2.17 in wide × 3.39 in deep (55 × 86 mm).

2 **Position Sleeve**

Place the pre-embedded sleeve horizontally into the groove, ensuring it is level and correctly aligned.

3 **Flush & Secure**

Ensure the sleeve is flush with the concrete or gravel surface before backfilling and curing.

STEP 3 — LIGHT FIXTURE INSTALLATION

1 **Connect Cable**

Connect the fixture to the pre-installed power cable and wrap the connection with outdoor-rated waterproof tape.

2 **Insert Fixture**

Place the fixture into the pre-embedded sleeve and press both ends firmly until the spring clips lock into place.

3 **Verify Alignment**

Confirm the fixture is securely fixed, horizontally aligned, and the lens surface is flush with the surrounding grade.

Important: Ensure male and female ends of all power and signal cables are tightly secured with locking nuts. After locking, wrap the connection point first with waterproof insulation tape, then with electrical tape. This dual-layer protection is required to maintain the IP67 rating.

POWER SUPPLY & ELECTRICAL — AC INSTALLATION

Single-Color Constant Lighting — AC (120–240 V)

Direct connection to power supply; no controller required for constant-on applications.

Line / Hot — Brown (Intl) · Black (NA) Neutral — Blue (Intl) · White (NA) Ground/Earth — Green/Yellow

DMX512 Control — AC (120–240 V)

Daisy-chain DMX signal from controller output to fixture DMX IN. Connect DMX OUT of each fixture to DMX IN of the next. Terminate the last fixture with a 120 Ω DMX terminator to prevent signal reflection.

DMX A — Brown DMX B — Blue DMX PI/PO — Yellow DMX GND — Black

Total loop power must not exceed **80%** of the power supply rating.

POWER SUPPLY & ELECTRICAL — DC INSTALLATION

Single-Color Constant Lighting — DC 24 V

Direct connection to 24 VDC power supply. Circuit load must not exceed 80% of supply wattage.

V+ Positive — Red V– Negative — Black

DMX512 Control — DC 24 V

Connect 3-wire DMX signal (GND, D+, D–) from controller to fixture DMX IN. Daisy-chain fixtures and terminate final unit with 120 Ω terminator.

V+ — Red V– — Black DMX D+ — Yellow DMX D– — Blue DMX PO — Green

Total loop power must not exceed **80%** of the power supply rating.

WIRE COLOR REFERENCE

North America — 120–277 VAC

Designation	Color
Line (Hot)	Black
Neutral	White
Ground / Earth	Green / Yellow
Data	Orange or Red

International — 220–240 VAC

Designation	Color
Line (Hot)	Brown
Neutral	Blue
Ground / Earth	Green / Yellow
Data	Black

SAFETY INSTRUCTIONS — READ BEFORE INSTALLATION

- Follow all safety instructions carefully. Failure to do so will void warranty.
- Ensure installation complies with all applicable local electrical codes and standards.
- Input voltage range: 100–240 VAC.
- Ensure mains input power is properly surge protected.
- Never make electrical connections while power is live.
- Do not make modifications or alter the product in any way.
- Keep luminaire clean and free of debris at all times.
- All connectors must be kept clean and dry during storage and installation.
- Once installed, all connectors must be mated; a DMX terminator is required on the last fitting in any DMX run.
- Always use manufacturer-approved replacement parts only.

MAINTENANCE & CARE

Cleaning & Inspection

Regularly clean dust and debris from the lens and housing. Inspect light housing and wiring connections periodically for signs of wear or damage.

Replacement of Parts

If replacement is necessary, use only manufacturer-approved light sources or power supply components. Unauthorized parts void the warranty.

Waterproofing

Periodically inspect all waterproof joints, cable entry seals, and connector mating points to ensure proper sealing and maintain IP67 integrity.

WARRANTY TERMS

1. Warranty Period

- 3 years from date of purchase (original invoice)

2. Coverage

- Manufacturing defects in materials or workmanship
- Failure or malfunction under normal use and installation
- Performance issues: unexpected dimming, failure to power on, output not meeting specifications
- Corrosion or weather damage under normal environmental conditions

3. Exclusions

- Improper installation, misuse, or failure to follow instructions
- Damage from accidents, power surges, water submersion beyond IP rating, vandalism, or natural disasters
- Normal wear and tear or cosmetic damage not affecting performance
- Modifications by unauthorized personnel
- Consumable replacements

4. Claim Process

- Contact TSLC customer support by email or phone
- Submit original purchase receipt as proof of purchase
- Provide detailed problem description and troubleshooting steps taken
- Include photos or video of the defect

5. Resolution

- Defective product repaired or replaced with equivalent model
- Minor issues: replacement parts shipped to customer
- Outbound shipping covered under warranty; customer responsible for inbound return shipping

6. Liability Limitation

- Warranty limited to repair or replacement of defective products only
- No liability for consequential damages, loss of profit, or business interruption

CONTACT THE SMART LIGHTING COMPANY

Web: www.thesmartlightingcompany.com

Email: sales@thesmartlightingcompany.com

Phone: 949-346-3456

Products and specifications subject to change without notice.