



Refrigeration LED Lighting Solutions

Commercial Food & Beverage Storage Solutions



Our refrigeration LED Lighting solutions are specifically designed to enhance visual appeal of meat, produce, deli, beverage and more. Top quality, Nichia bin-sorted LEDs with high CRI and R9 values produce high quality, even illumination. Combined with proper color temperature, quality illumination can increase the customer buy impulse to purchase. As an innovator in the LED refrigeration lighting market, we were awarded the DOE Gateway Freezer case study in 2006/2008. We were also one of the first companies to receive DLC Listings on our refrigeration fixtures.

- | | |
|--|------------------------------|
| ✓ Low wattage, low voltage, low heat operation | ✓ Bright, even illumination |
| ✓ Increased energy savings | ✓ Shorter installation times |
| ✓ Dimmable with Occupancy sensors | ✓ 5 year limited warranty |

Vertical Cooler and Horizontal Case Lighting

**Bright, Even Illumination to make food look more appealing.
Save money with reduced installation time and energy savings!**

RB26HP6 is our go-to fixture for refrigerator illumination needs. They are wet location rated, washdown approved, and easy to install with 3 mounting styles: snap-in channel, flat/adjustable brackets, or flat/adjustable magnetic mounting.

RB26HP6 Horizontal

This light bar is best used for horizontal canopy, shelf, or case lighting with reach-in sections such as Deli, Seafood, Dairy, Meat, or Produce. It is offered in industry-standard lengths 47" or 68" and color temperatures options 2800k, 3000k, 4100k, or 5000k. Wet location – Washdown approved.

[Click here for product page](#)

RB26HP6 Vertical

Vertical reach-in case lighting includes any cooler or walk-in freezers where proper visibility is needed without distracting from the products. Standard color temperature is 4100k. The 59" length is typically used in grocery stores while the 68" length is mostly used in convenience store applications. Wet location – Washdown approved.

[Click here for product page](#)



- ✓ 109lm/ft, 95CRI
- ✓ Zero Warm-Up Time
- ✓ 90,000 Hour Lifetime
- ✓ Even, Uniform Illumination
- ✓ Wet Rated + Washdown Approved

	RB26HP6	RB26HP6
APPLICATION	Horizontal Case Lighting	Vertical Case Lighting
PERFORMANCE	5w/ft. 416lm/ft.	5w/ft. 416lm/ft.
LUMENS/WATT	109	109
R9	77	77
CRI	95	95
VOLTAGE	24VDC	24VDC
LENGTHS	47", 47"x 2, 68", 68"x 2	47", 59", 68"
BEAM ANGLE	140°	140°
LIFETIME	>100,000 hours	>100,000 hours
CERTIFICATIONS	UL, cUL, DLC	UL, cUL, DLC



Canopy, Case, Shelf Lighting

Shorter installation times to reduce labor costs

SB33 Canopy, Shelf, Case Lighting

SB33 delivers 650-764lm per foot and is designed for 4ft, 8ft and 12ft cases. This fixture is offered in industry-standard color temperatures, 2700k, 3000k, 4100k, or 5000k with 3 beam angle options.


[Click here for product page](#)

Single and joint connected fixture options for streamlined installation.




- ✓ Ultra Slim and Low Profile
- ✓ Zero Warm-Up Time Even,
- ✓ Uniform Illumination
- ✓ Wet Location Rated

	SB33-6	SB33-7
APPLICATION	Horizontal Refrigeration Shelf Lighting	Horizontal Refrigeration Shelf Lighting
PERFORMANCE	6w/ft, 650lm/ft.	7w/ft., 764lm/ft.
VOLTAGE	24VDC	24VDC
LENGTHS	46", 46"x2, 46"x3	46", 46"x2, 46"x3
BEAM ANGLE	18x26°, 13x17°, 120°	18x26°, 13x17°, 120°
CERTIFICATIONS	UL, cUL, DLC	UL, cUL, DLC
ENVIRONMENT	Wet Location	Wet Location
LIFETIME	>100,000 hours	>100,000 hours

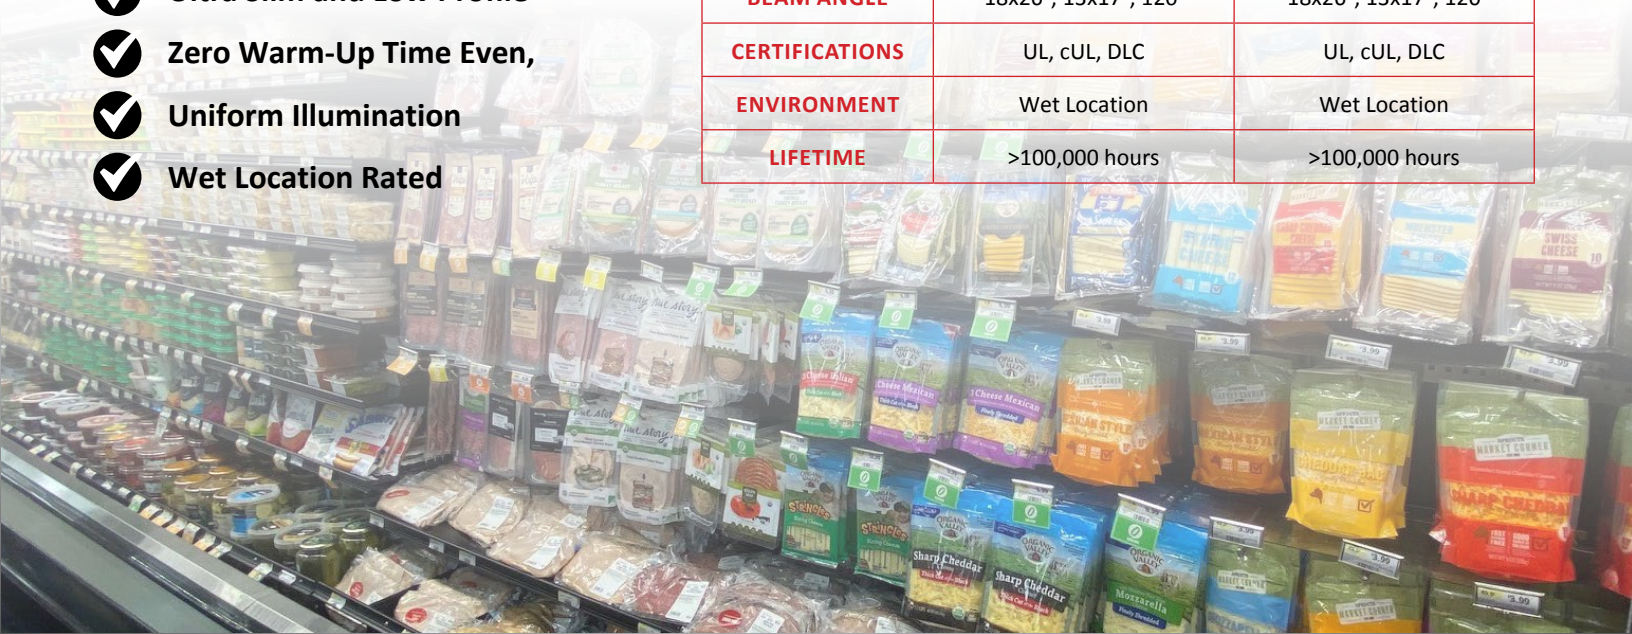

Get in Touch Today!

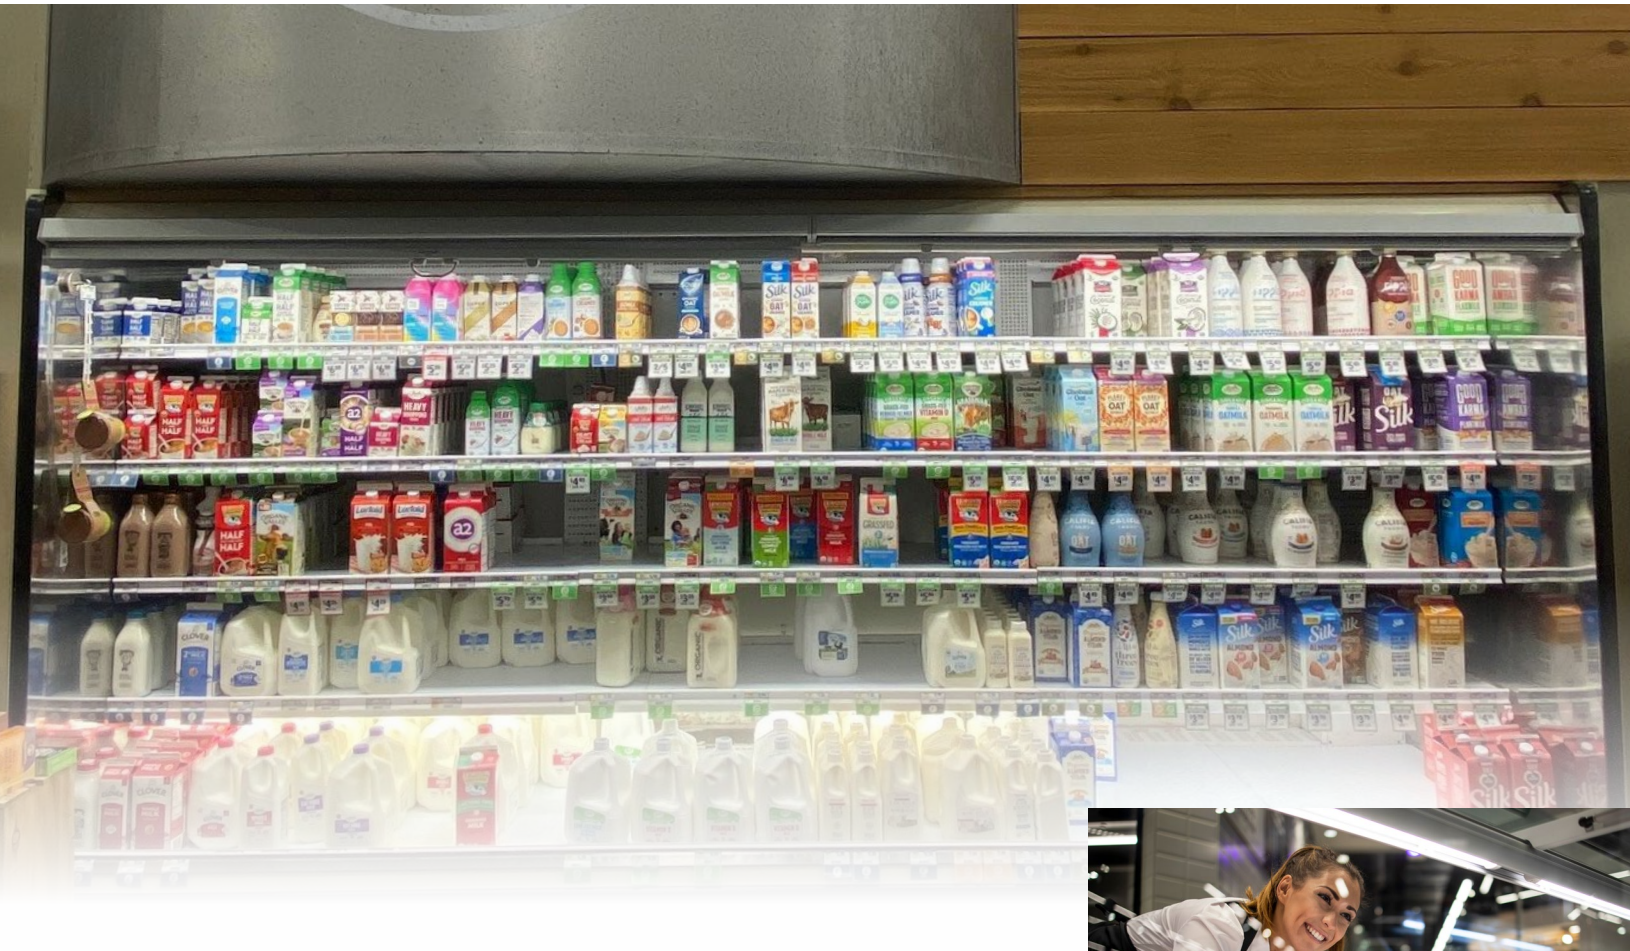

ASK AN EXPERT

Having trouble choosing
the correct fixture?
We are here to help.



949-346-3456



sales@thesmartlightingcompany.com



thesmartlightingcompany.com

