

- ✓ Premium Nichia 2 step Bin-sorted LEDs
- ✓ Top quality patented optical beams
- ✓ Universal Voltage - Integral Driver
- ✓ Plug and play connectors
- ✓ Full Saturation to over 100 feet
- ✓ Outdoor Locations
- ✓ 5-Year Warranty



HB50 SERIES

EXTERIOR/INTERIOR LED ARCHITECTURAL LINEAR LIGHTING

HB50C



Performance: 16w/ft | 1368lm/ft, 20w/ft | 1691lm/ft
Beam Angles: 8°, 15°, 20°, 30°, 45°, 60°, 75°, 90°, 120°, 18x40°, 13x17°, 15x35°, 18x26°, 18x58°, 30x60°
CCT: Static Colors
Control: 0-10v dimming
Fixture lengths: 12", 24", 36", 48"

HB50A




Performance: 20w/ft
Beam Angles: 15°, 20°, 30°, 45°, 60°, 75°, 90°, 120°, 18x26°, 18x58°, 30x60°
CCT: RGB
Control: DMX self-addressing per fixture or 12"
Fixture lengths: 12", 24", 36", 48"

HB50C RGBW




Performance: 20w/ft
Beam Angles: 15°, 20°, 30°, 45°, 60°, 75°, 90°, 120°, 18x26°, 18x58°, 30x60°
CCT: RGBW
Control: DMX self-addressing per fixture or 12"
Fixture lengths: 12", 24", 36", 48"


PROFILE

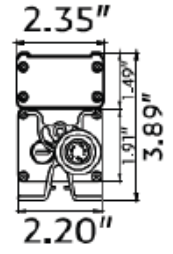


MOUNTING OPTIONS

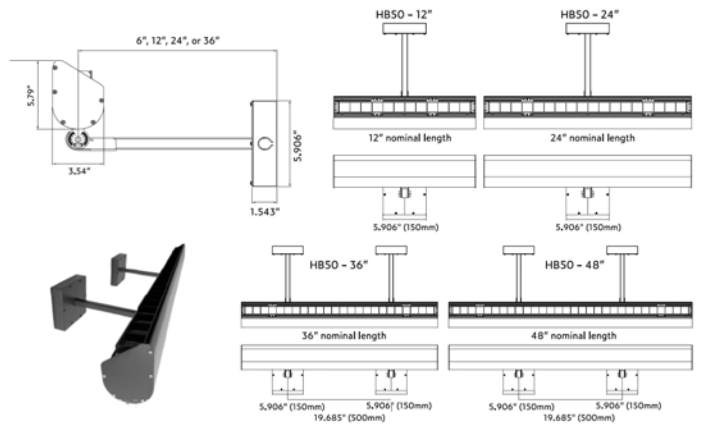

- Integral Adjustable brackets
- Optional Powder Coated housing w/Integral Glare Shield
- Extended Arm or Ground Post mounting
- Extended Arm lengths: 6", 12", 18", 24" or 36"
- Row mounted or stand-alone
- Black, Bronze, White & Silver Powder-coated finish
- -Additional RAL custom colors are available
- Optional Louvers: 12", 24", 36", 48"

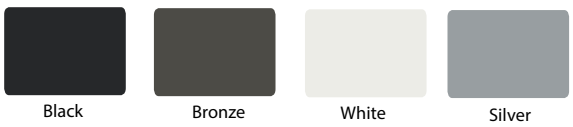

COLOR TEMPERATURES



CERTIFICATIONS

