


# Corner Mounting Channel


Aluminum Channel for Flexible LED Strip

**CM-7272**

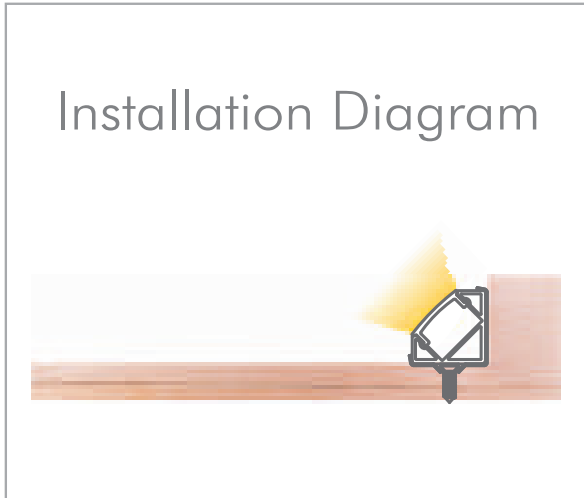

## Specifications

- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 18.4\*18.4mm [0.72\*0.72in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- linear LED Density@milky cover: ≥240LED/M/Row [73LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+14mm [0.55in.]

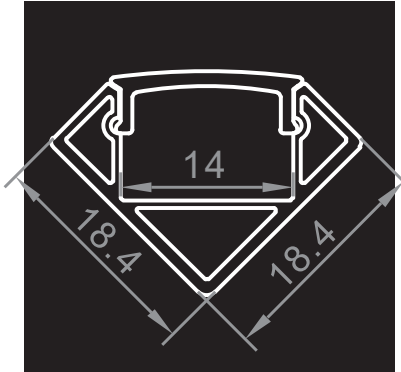

## Part Number


MODEL	CHANNEL FINISH	LENS	QUANTITY
CM 7272 Corner Mount Channel	<b>WH</b> White <b>SI</b> Silver <b>BK</b> Black	<b>C</b> Clear Lens <b>F</b> Frosted Lens <b>M</b> Milky Lens	<b>39</b> Available in 1 meter (39") increments

# Corner Mounting Channel


## Aluminum Channel for Flexible LED Strip

CM-  
7272

### Aluminum Options

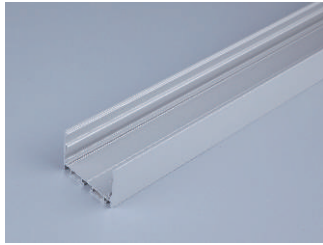

Silver

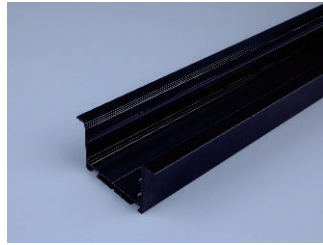


Black




White


### Diffusion PC Cover Options




Milky Transmission:  
83%For Dot-free



Transparent Transmission:  
93%For High transmittance



Black Transmission:  
60%For Decoration



Prismatic Transmission: 83%  
For Anti-glare (UGR < 19 optional)

# Corner Mounting Channel

## Compatible LED Strips

CM-  
7272

STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating
✓			ULHE-9519S	0.32" (8mm)	IP20
✓			ULHE-9522S	0.32" (8mm)	IP20
✓			HEFC-9687S	0.32" (8mm)	IP20
✓			OSMV-FE62S	0.32" (8mm)	IP20
✓			TDFP-414S	0.32" (8mm)	IP54
✓			ULPS-9033S	0.39" (10mm)	IP20
✓			HEFC-9677S	0.39" (10mm)	IP20
✓			ULHE-9561S	0.39" (10mm)	IP20
✓			HEP-L624S	0.39" (10mm)	IP20
	✓		CMLP-9688S	0.39" (10mm)	IP20
		✓	TUNE-LN28S	0.39" (10mm)	IP20
		✓	HEFC-9678S	0.39" (10mm)	IP20