
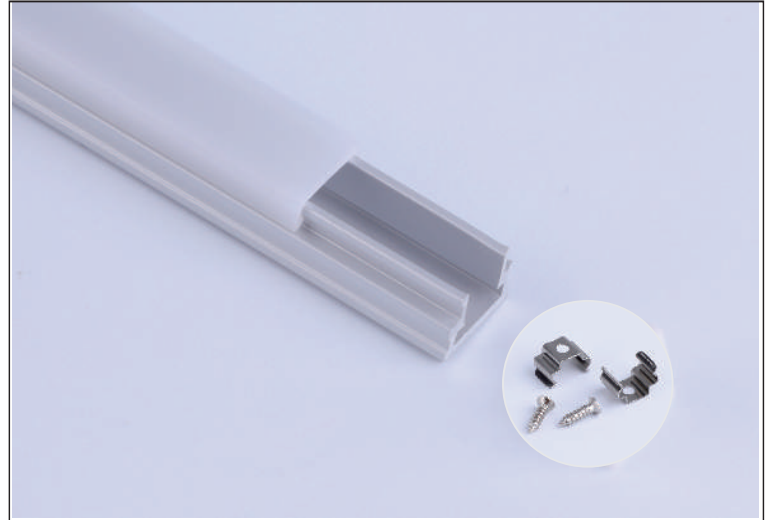


# Mini Surface Mounting Channel


Aluminum Channel for Flexible LED Strip

**MSM-4735**

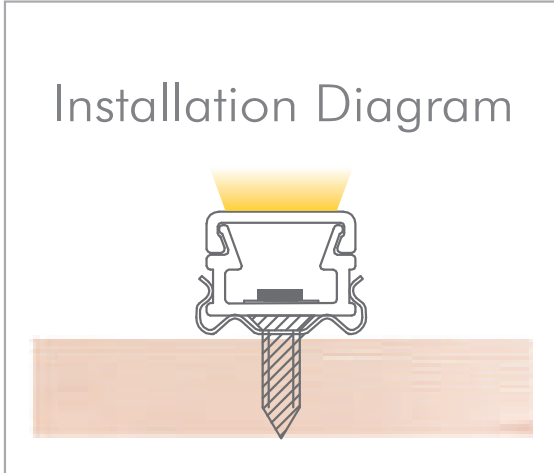

## Specifications

- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 12\*9mm [0.47\*0.35in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8mm [0.31in.]
- Linear LED Density@milky cover: ≥ 120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]

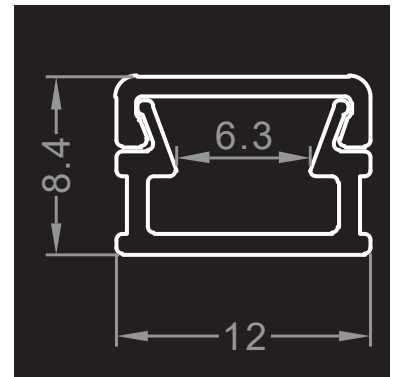

## Part Number


MODEL	CHANNEL FINISH	LENS	QUANTITY
<b>MSM-4735</b> Mini Surface Mount Channel	<b>WH</b> White <b>SI</b> Silver <b>BK</b> Black	<b>C</b> Clear Lens <b>F</b> Frosted Lens <b>M</b> Milky Lens	<b>39</b> Available in 1 meter (39") increments

# Mini Surface Mounting Channel


Aluminum Channel for Flexible LED Strip

MSM-  
4735

## Aluminum Options



Silver




Black




White


## Diffusion PC Cover Options




Milky Transmission:  
83%For Dot-free



Transparent Transmission:  
93%For High transmittance



Black Transmission:  
60%For Decoration



Prismatic Transmission: 83%  
For Anti-glare (UGR < 19 optional)

# Mini Surface Mounting Channel

Compatible LED Strips

MSM-  
4735

STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating
✓			HEFC-9682S	0.2" (5mm)	IP20
✓			ICBI-9645S	0.24" (6mm)	IP20
✓			ULHE-9519S	0.32" (8mm)	IP20
✓			ULHE-9522S	0.32" (8mm)	IP20
✓			HEFC-9687S	0.32" (8mm)	IP20
✓			OSMV-FE62S	0.32" (8mm)	IP20
✓			TDFP-414S	0.32" (8mm)	IP54