


# Office Suspended Mounting Channel


Aluminum Channel for Flexible LED Strip

OS-138

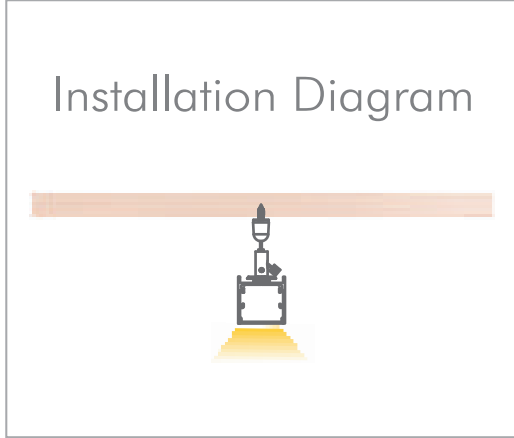

## Specifications

- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 35\*35mm [1.38\*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15/20mm [0.59/0.79in.]2-rows
- Linear LED Density@milky cover: ≥ 120LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51in.]

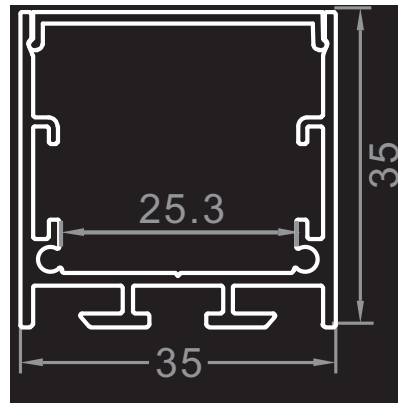

## Part Number




MODEL	CHANNEL FINISH	LENS	QUANTITY
OS-138 Office Suspended Channel	<b>WH</b> White <b>SI</b> Silver <b>BK</b> Black	<b>C</b> Clear Lens <b>F</b> Frosted Lens <b>M</b> Milky Lens	<b>39</b> Available in 1 meter (39") increments

# Office Suspended Mounting Channel

Aluminum Channel for Flexible LED Strip

OS-  
138

## Connection Options

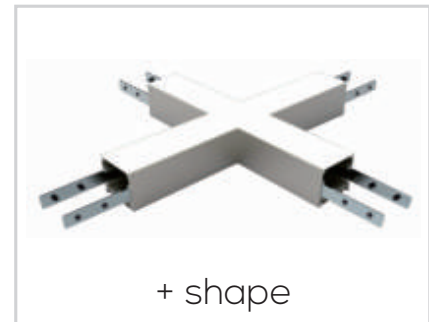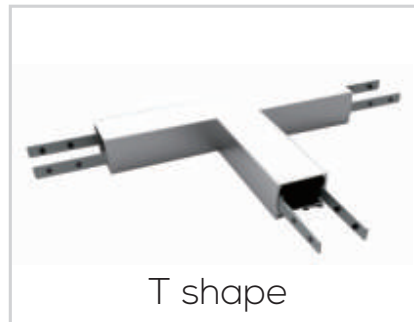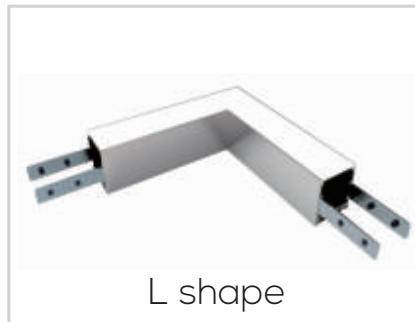


# Office Suspended Mounting Channel


Aluminum Channel for Flexible LED Strip

OS-  
138

## Aluminum Options

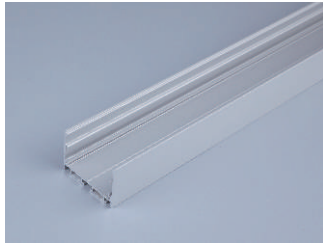

Silver

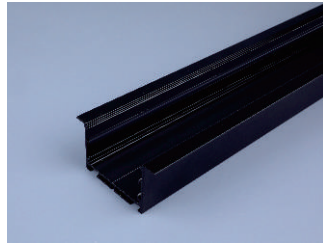


Black




White


## Diffusion PC Cover Options




Milky Transmission:  
83%For Dot-free



Transparent Transmission:  
93%For High transmittance



Black Transmission:  
60%For Decoration

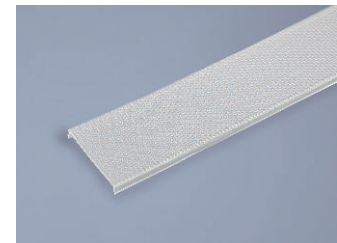

Prismatic Transmission: 83%  
For Anti-glare (UGR < 19 optional)

# Office Suspended Mounting Channel

Compatible LED Strips

---

OS-  
138

HEDS-FE40S  
HETS-L493S