



Refrigeration LED Lighting Solutions

Commercial Food & Beverage Storage Solutions

Our refrigeration LED Lighting solutions are specifically designed to enhance visual appeal of meat, produce, deli, beverage and more. Top quality, Nichia bin-sorted LEDs with high CRI and R9 values produce high quality, even illumination. Combined with proper color temperature, quality illumination can increase the customer buy impulse to purchase. As an innovator in the LED refrigeration lighting market, we were awarded the DOE Gateway Freezer case study in 2006/2008. We were also one of the first companies to receive DLC Listings on our refrigeration fixtures.



Low wattage, low voltage, low heat operation



Increased energy savings



Dimmable with Occupancy sensors



Bright, even illumination



Shorter installation times



5 year limited warranty

Vertical Cooler and Horizontal Case Lighting

Bright, Even Illumination to make food look more appealing. Save money with reduced installation time and energy savings!

RB26HP6 is our go-to fixture for refrigerator illumination needs. They are wet location rated, washdown approved, and easy to install with 3 mounting styles: snap-in channel, flat/adjustable brackets, or flat/adjustable magnetic mounting.

RB26HP6 Horizontal

This light bar is best used for horizontal canopy, shelf, or case lighting with reach-in sections such as Deli, Seafood, Dairy, Meat, or Produce. It is offered in industry-standard lengths 47" or 68" and color temperatures options 2800k, 3000k, 4100k, or 5000k. Wet location – Washdown approved.

RB26HP6 Vertical

Click here for product page

Vertical reach-in case lighting includes any cooler or walk-in freezers where proper visibility is needed without distracting from the products. Standard color temperature is 4100k. The 59" length is typically used in grocery stores while the 68" length is mostly used in convenience store applications. Wet location – Washdown approved.

Click here for product page





109lm/ft, 95CRI



Zero Warm-Up Time



90,000 Hour Lifetime



Even, Uniform Illumination



Wet Rated + Washdown Approved



	RB26HP6	RB26HP6
APPLICATION	Horizontal Case Lighting	Vertical Case Lighting
PERFORMANCE	5w/ft. 416lm/ft.	5w/ft. 416lm/ft.
LUMENS/WATT	109	109
R9	77	77
CRI	95	95
VOLTAGE	24VDC	24VDC
LENGTHS	47", 47"x 2, 68", 68"x 2	47", 59", 68"
BEAM ANGLE	140°	140°
LIFETIME	>100,000 hours	>100,000 hours
CERTIFICATIONS	UL, cUL, DLC	UL, cUL, DLC







Canopy, Case, Shelf Lighting

Shorter installation times to reduce labor costs

SB8 Summit Series

SB8 delivers 404lm per foot and is offered in 46" or 66" lengths. This fixture is offered in industry-standard color temperatures, 2800k, 3000k, 4100k, or 5000k.

Click here for product page



SB12 is more powerful at 563lm per foot and is offered in 48" or 66" lengths. This fixture is offered in industry-standard color temperatures, 2700k, 3000k, 4100k, or 5000k.

Click here for product page

Single and joint connected fixture options for streamlined installation.







Ultra Slim and Low Profile



Zero Warm-Up Time




Even, Uniform Illumination



Damp Rated

	SB8	SB12
APPLICATION	Horizontal Refrigeration Shelf Lighting	Horizontal Refrigeration Shelf Lighting
PERFORMANCE	4.5w/ft, 404lm/ft.	6w/ft., 563lm/ft.
VOLTAGE	24VDC	24VDC
LENGTHS	46", 46" x 2 , 66", 66 x2"	48", 66", 48"x2, 66"x2
BEAM ANGLE	120°	120°
CERTIFICATIONS	UL, cUL, DLC	UL, cUL, DLC
ENVIRONMENT	Damp Location	Damp Location
LIFETIME	>100,000 hours	>100,000 hours

Get in Touch Today!

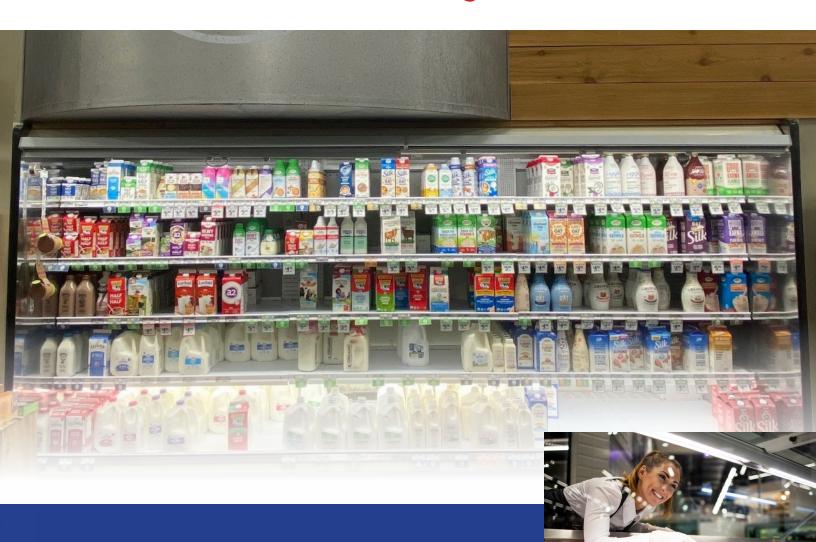

ASK AN EXPERT

Having trouble choosing the correct fixture? We are here to help.



949-346-3456



sales@thesmartlightingcompany.com



thesmartlightingcompany.com

